

Gross Power
100 kW (134 HP) at 2,200 rpm

Net Power
98 kW (131 HP) at 2,200 rpm

Bucket Capacity
0.50 ~ 0.77 m³

Operating Weight
15,430 kg / 34,020 lb

HX145A LCR

With EU Stage V Engine Installed



▲ HYUNDAI CONSTRUCTION EQUIPMENT

Head Office(Sales Office)

3F, Bundang First Tower, 55 Bundang-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13591, Korea

Americas Operation : Hyundai Construction Equipment Americas, Inc.

6100 Atlantic Boulevard Norcross Ga 30071 U.S.A
TEL (1) 847-678-823-7802 FAX (1) 847-678-823-7778

Europe Operation : Hyundai Construction Equipment Europe N.V.

Hyundailaan 4,
3980 Tessenderlo, Belgium
TEL (32) 14-56-2200 FAX (32) 14-59-3405

PLEASE CONTACT

WHAT'S NEWEST AND BEST

HX145A LCR

THE BEST PRODUCTIVITY AND FUEL EFFICIENCY

- EU STAGE V Engine **NEW**
- Eco Report **NEW**
- Lifting Mode **NEW**
- IPC(Intelligent Power Control) **Upgrade**
- Fuel Rate Information
- Eco Gauge
- Automatic Engine Shutdown

NEW EXTERIOR DESIGN FOR ROBUSTNESS AND SAFETY

- ROPS / FOG Cabin **Option**
- Reinforced Durability of Upper and Lower Structure and Attachments
- Durable Cooling Module
- High-grade (High-pressure) Hoses

EASY CONTROL AND COMFORTABLE OPERATION

- Key On Init Work Mode **NEW**
- Cabin Handle Improvement **NEW**
- One Pedal Travel Straight **Option**
- Proportional Auxiliary Hydraulic System **Option**
- 2 Way Proportional RCV & Pedal Control Selection **Option**
- Fine(Cushion/Free) Swing Control **Option**
- Intelligent & Wide Cluster
- OME(Owner Menu Editing)
- Boom/Arm Speed

THE ULTIMATE SAFE ENVIRONMENT

- Auto Safety Lock **NEW**
- Electronic Swing Parking Brake **NEW**
- AAVM **Option**
- RH Side View Camera **Option**
- Seatbelt Warning Alarm
- Emergency Engine Stop Switch

SERVICEABILITY AND TELEMATICS

- Hi MATE **Option**
 - ECD(Engine Connected Diagnostics) **NEW**
 - Mobile Fleet App
- HCE-DT Air **NEW**
- 2x Longer Lasting Filter (1000hr)
- Improved Routine Maintenance **Upgrade**



* Photo may include optional equipment.




EU STAGE V CERTIFIED ENGINE

Cummins F3.8 engine is satisfying the most strict environmental emission regulation in the world (Reduction in PM 60%)

EU STAGE V Engine **NEW**

Now in its fourth decade of continuous improvement, the F3.8 for 2019 feature an EGR-free design that delivers 8 percent more power and 4 percent fuel economy and longer maintenance intervals contribute to a reduced cost of operation.

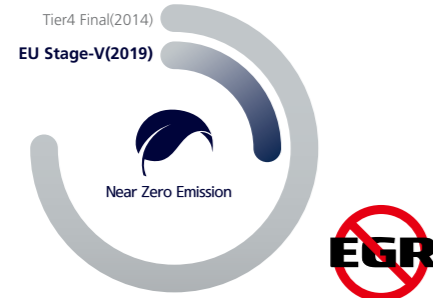

Lifting Mode **NEW**

This work mode improves fine operability and lift capability through RPM reduction, power boost action and pump flow control.

IPC(Intelligent Power Control) **Upgrade**

HX A Series adopts the upgraded IPC system. It is able to optimize pump flow rate and power at the various working condition through the individual pump control. Furthermore, optimized design of MCV and pipe line minimizes energy loss such as conflux and throttle loss.



ENVIRONMENTALLY FRIENDLY FUEL EFFICIENCY

Eco Report **NEW**

It reports the excavator's inefficient operation status and help improving operator's working habit.



Fuel Rate Information

Fuel information is displayed as average rate and latest fuel consumed for guiding to economy operating.



Eco Gauge

Gauge level changes in accordance with engine working load and color indicates fuel saving-operation status.



Automatic Engine Shutdown

Adjustable 'Automatic Engine Shutdown' significantly reduces idle time, overall operating hours and fuel consumption.



THE BEST PRODUCTIVITY AND FUEL EFFICIENCY

HX A Series is equipped with eco-friendly, high-performance engines that meet the EU Stage V emission requirements.

BETTER FUEL-EFFICIENCY
(Compared to HX Series at P mode)



* Photo may include optional equipment.



NEW EXTERIOR DESIGN FOR ROBUSTNESS AND SAFETY

The true value of HX A Series lies in its durability and high productivity. The robust upper and lower frame structure can endure external shock and heavy work loads. Attachment performance has been proven through rigorous field testing. No matter how tough the working environment is, you can always rely on the HYUNDAI Excavator HX A Series.



We make the best performance in rough working conditions without any unsureness with trustworthy HX145A LCR.




HX A Series is equipment with eco-friendly, high-performance engines that meet the EU Stage V emission requirement. Become a true leader on the ground with HX A Series.

ROPS / FOG Cabin

The cabin structure of Hyundai HX A Series is using integrally welded low-stress, high strength steel to meet ROPS and FOG certification.

- ROPS : Roll-Over Protective Structures ISO12117-2
- FOG : Falling Object Guard, ISO10262 Level2 **Option**

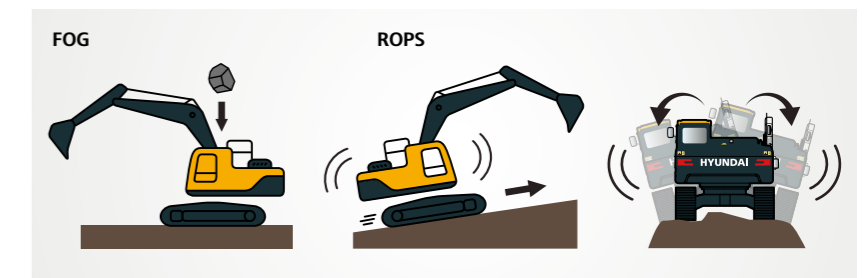

Reinforced Durability of Upper and Lower Structure and Attachments

The upper and lower structure and attachments of HX A Series have higher durability than demanded on the site, as proven through numerous tests including road tests and virtual simulation. The wear resistance of the bucket has been improved by use of new material.



Durable Cooling Module

HX A Series has a durable cooling module that passed stringent tests, demonstrating the highest productivity in tough working environments.

Hi-grade (High-pressure) Hoses

The HX A Series uses high-pressure hoses with improved heat and pressure resistance, greatly increasing the durability of the equipment.

*Photo may include optional equipment.



EASY CONTROL AND COMFORTABLE OPERATION

Many electronic functions are concentrated in the most convenient spot for operators to improve work efficiency. The highly-advanced infotainment system, a product of HCE's intensive information technology development, enables both productivity and comfort while working! HX A Series is designed with the operator in mind.

Intelligent & Wide Cluster

The 8" capacitive-type display(like smart-phone display) of HX A Series is delivering excellent legibility. The centralized switches on the display allow convenience of checking the urea level and temperature outside the cabin.

Front Side Air-Vent



One Pedal Travel Straight Option

One pedal straight travel is available for customers' convenience when long distance traveling or combination of attachment work with traveling is necessary.



Proportional Auxiliary Hydraulic System Option

Proportional control switch with better speed control helps operators to enlarge the operation convenience whenever they do time-consuming work. And this function can be switched with pedal valve in cluster setting menu.

Key On Init Work Mode NEW

Operator can maintain previously set about attachment mode when starting.



Cabin Handle Improvement NEW

Handle design on the cabin door is improved and offers better convenient while operator get on and off the cabin.




Fine Swing Control Option

This option enables smooth movement at the start and stop of swing operation (Cushion Swing). In addition, it reduces the shaking of the weight when lifting operation(Free Swing).

OME(Owner Menu Editing)

The Owner of machine can restrict operators access the set of functions. In the menu, Owner can set the list of the function to lock or unlock it. It is necessary to input the password to access the set of function.

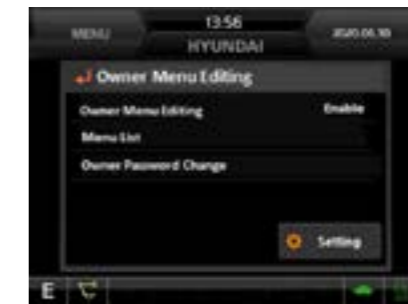

Boom/Arm Speed

Boom-up speed compared to swing speed can be adjusted by activating/deactivating boom priority function. Arm-in speed can be also tuned by activating/deactivating arm regeneration function.




HX145A LCR with advanced technology ensures our safety on a construction site.



HX A Series excavators are products of HCE's spirit of initiative, creativity, and strong drive. HCE engineers, who are the best in the industry, have worked tirelessly to offer a zero-defect product. The new HX A Series reflects customers' needs in the field gleaned by thorough monitoring.

Auto Safety Lock **NEW**

It prevents unintended operation. If operator unlock safety lever when RCV lever is pressed, excavator is not controlled by RCV lever.

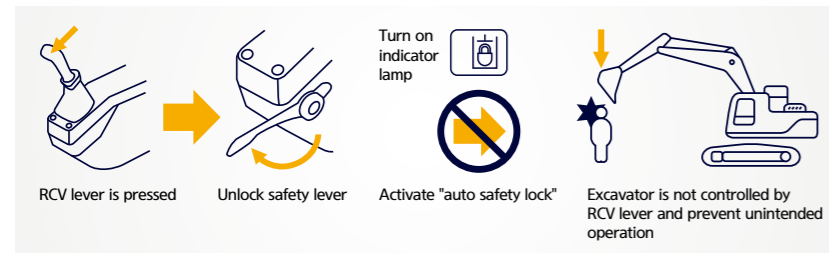

Electronic Swing Parking System **NEW**

An electronic valve and control system is applied to improve safety and utilization. The opening and closing time of the swing brake valve is controlled according to the sensing and control system.

AAVM(Advanced Around View Monitoring) Camera System **Option**

HX A Series has a state-of-the-art AAVM video camera system to secure field of vision for operators in all directions, thereby preventing accidents. Operators can easily check the workplace in the front and rear and to the right and left.

- **AAVM**(Advanced Around View Monitoring) : Secure field of vision in all directions by ten views including 3D bird's eye view and 2D/4CH view.
- **IMOD**(Intelligent Moving Object Detection) : Inform when people or dangerous objects are detected within the range of operation(recognition distance : 5 m).



* Rear & RH view camera option is also available.

Seatbelt Warning Alarm

If the seatbelt is not buckled when the ignition key is turned, an alarm is triggered in intervals along with a continuous visual alert. This emphasises our priority for operator safety. Emergency Engine Stop Switch Manual engine stop switch behind the seat is used for emergency stop. It can be reached from outside of cabin.


Emergency Engine Stop Switch

Manual engine stop switch behind the seat is used for emergency stop. It can be reached from outside of cabin.



THE ULTIMATE SAFE ENVIRONMENT

The true value of HX A Series lies in its durability. The robust frame structure and the attachments show the real value of HX A Series in tough working environments and promise higher productivity.

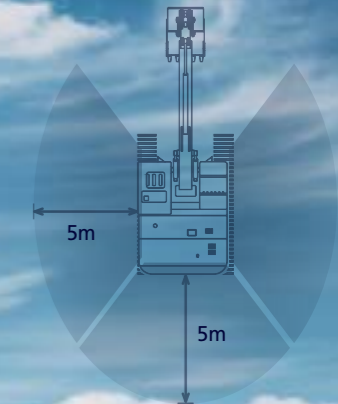

* AAVM (OPTION APPLIED)



*Photo may include optional equipment.



SERVICEABILITY AND TELEMATICS

IoT / ICT / AI-based digital technology.
Creating a smart construction site. Maximizes connectivity, productivity, and safety for successful businesses.



*Photo may include optional equipment.

Hi MATE

Option

IT'S CONVENIENT, EASY AND VALUABLE

Hi MATE Hyundai's newly developed remote management system, utilizes GPS-satellite technology to provide customers with the highest level of service and product support available. Hi MATE enables users to remotely evaluate machine performance, access diagnostic information, and verify machine locations at the touch of a button.

WHAT IS BENEFITS



Increase Productivity

It helps you operate machines in efficient. You can check the difference between total engine hours and actual working hours. See how productive your machines are and plan any required cost saving solutions. Hi MATE offers working information such as working / idling hours, fuel consumption and rate.



Convenient and Easy Monitoring

There is nothing much to do to monitor your machines. Just log on to the Hi MATE website or mobile application. Hi MATE allows you to watch your machines whenever and wherever you are.





Security

Protect your machines from theft or unauthorized usage with Hi MATE. If the machine moves out of the Geofence boundary, you will get alerts.

ECD(Engine Connected Diagnostics) **Option**


ECD will support the after sales technicians and dealers with a diagnostics report (via e-mail, mobile, app or Hi MATE) on the engine performance. This will help after sales technicians arrive on site with the necessary tools and parts to fix troubles in one visit.

ECD is an integrated remote diagnostics service between Cummins cloud and Hi MATE cloud.

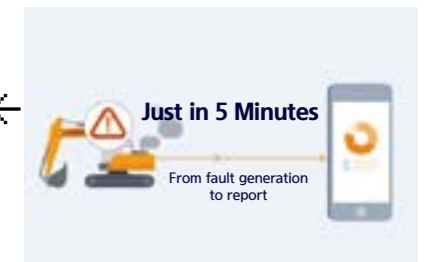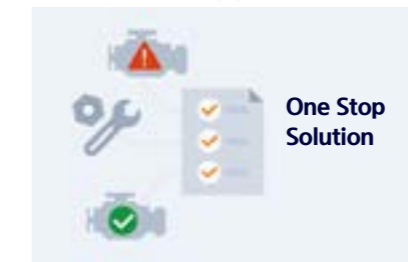

Mobile Fleet App. **Option**

The new Mobile App is optimized to fleet management. It provides productivity, health insights based on telematics technology and enables fleet owner just focus on most wanted equipment in view of economical usage, utilization, fault codes and maintenance. The new Mobile App sorts equipment in order of eco-index, utilization-index and fault code level automatically so that urgent equipment pops up automatically.

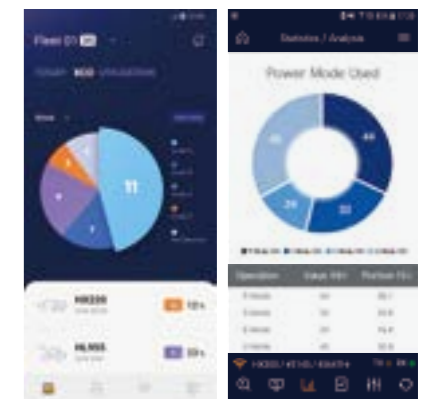

Hi MATE Fleet App HCE-DT AIR App

HCE-DT Air **NEW**

HCE-DT Air connect you and your equipment wirelessly via smartphone and laptop right on site. You can diagnose root causes and troubleshoot for fault codes through the connection.

2x Longer Lasting Filter (1000hr)

The length of product life period is improved from 500 hours to 1,000hours. (When using CK-4 E/G Oil)

- Engine Oil
- Engine Oil Filter
- Pre-filter
- Fuel Filter



Improved Routine Maintenance

Easy access for maintenance means regular checks get done faster, giving you more uptime and reducing operating costs. Ground-line access to filters, lube fittings and master switch makes service more convenient on HX A Series.

SPECIFICATIONS

ENGINE

Maker / Model	CUMMINS / F3.8
Type	4-cycle, turbocharged, charge air cooled, electronic controlled diesel engine
Gross Power	100 kW (134 HP) at 2,200 rpm
Net Power	98 kW (131 HP) at 2,200 rpm
Max. Power	100 kW (134 hp) at 2,200 rpm
Peak Torque	550 N · m (406 lb · ft) at 1,500 rpm
Displacement	3.8 ℓ (229 cu in)

HYDRAULIC SYSTEM

MAIN PUMP	
Type	Variable displacement tandem axis piston pumps
Max. Flow	2 × 127 ℓ /min (33.5 U.S. gpm)
PILOT PUMP	
Type	Fixed displacement gear pump single stage
Max. Flow	29.3 ℓ /min (7.7 U.S. gpm)

HYDRAULIC MOTORS

Travel	Variable displacement axial piston motor
Swing	Two fixed displacement axial piston motor

RELIEF VALVE SETTING

Implement Circuits	350 kgf/cm ² (4,980 psi)
Travel	350 kgf/cm ² (4,980 psi)
Power Boost (Boom, Arm, Bucket)	380 kgf/cm ² (5,410 psi)
Swing Circuit	280 kgf/cm ² (3,990 psi)
Pilot Circuit	40 kgf/cm ² (569 psi)

HYDRAULIC CYLINDERS

No. of Cylinder Bore X Stroke	Boom : 2-∅105 × 1,105 mm
	Arm : 1-∅115 × 1,138 mm
	Bucket : 1-∅100 × 850 mm
	Blade : 2-∅100 × 250 mm
	2PCS 1st : 2-∅105 × 995 mm 2nd : 1-∅145 × 613 mm

* Hyundai Bio Hydraulic Oil (HBHO) available.

DRIVES & BRAKES

Drive Method	Fully hydrostatic type	
Drive Motor	Axial piston motor, in-shoe design	
Reduction System	Planetary reduction gear	
Max. Drawbar Pull	HX145A LCR	HX145A LCR HW
	12,672 kgf (27,940 lbf)	16,717 kgf (36,850 lbf)
Max. Travel Speed (High / Low)	3.3 km/hr (2.1 mph) / 5.6 km/hr (3.5 mph)	2.5 km/hr (1.6 mph) / 4.4 km/hr (2.7 mph)
	Gradeability 35° (70%)	
Parking Brake	Multi wet disc	

CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatiguelless operation.

Pilot Control	Two joysticks with one safety lever (LH) : Swing and arm, (RH) : Boom and bucket
Traveling and Steering	Two levers with pedals
Engine Throttle	Electric, dial type

SWING SYSTEM

Swing Motor	Fixed displacement axial piston motor
Swing Reduction	Planetary reduction gear
Swing Bearing Lubrication	Grease-bathed
Swing Brake	Multi wet disc
Swing Speed	11.4 rpm

SERVICE CAPACITIES

	liter	US gal
Fuel Tank	210	55.5
Engine Coolant	24.5	6.47
Engine Oil	12	3.2
Swing Device	3.5	0.9
Final Drive	2.3	0.6
Hydraulic System (Including Tank)	180	47.6
Hydraulic Tank	96	25.4
DEF/AdBlue(R)	27	7.1

UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

Center Frame	X - Leg Type	
Track Frame	Pentagonal Box Type	
	HX145A LCR (D)	HX145A LCR HW
No. of Shoes on Each Side	47	47
No. of Carrier Roller	2 x 2	2 x 2
No. of Track Roller	2 x 7	2 x 7
No. of Rail Guard	2	Full Rail Guard

OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 4,600 mm (15' 1") boom, 2,500 mm (8' 2") arm, SAE heaped 0.58 m³ (0.76 yd³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.

OPERATING WEIGHT

Shoes	Type	Width mm(in)	Operating Weight		Ground Pressure kgf/cm ² (psi)
			kg (lb)		
Triple Grouser	500 (20")	HX145A LCR	15,215 (33,540)	0.46 (6.49)	
			HX145A LCR (Rubber Pad)	15,185 (33,480)	0.45 (6.37)
			HX145A LCRD	16,015 (35,310)	0.48 (6.83)
			HX145A LCRD (Rubber Pad)	15,985 (35,240)	0.47 (6.71)
	600 (24")	HX145A LCR	15,430 (34,020)	0.39 (5.49)	
			HX145A LCR (Track Pad)	15,990 (35,250)	0.40 (5.62)
			HX145A LCRD	16,240 (35,800)	0.41 (5.77)
			HX145A LCR (Track Pad)	16,800 (37,040)	0.42 (5.90)
	700 (28")	HX145A LCR	15,650 (34,500)	0.34 (4.76)	
			HX145A LCRD	16,465 (36,300)	0.35 (5.02)
			HX145A LCR HW	17,880 (39,420)	0.39 (5.52)
			HX145A LCR HW	18,120 (39,950)	0.34 (4.89)


AIR CONDITIONING SYSTEM

The air condition system for the machine contains the fluorinated greenhouse gas with global warming potential of R134a. (Global Warming Potential : 1,430) The system hold 0.75 kg refrigerant consisting of a CO₂ equivalent of 1.07 metric tonnes. For more information, Please refer to the manual.

DIMENSIONS & WORKING RANGE

HX145A LCR / HX145A LCRD MONO BOOM DIMENSIONS

4.10 m (13' 5"), 4.60 m (15' 1") BOOM and 1.90 m (6' 3"), 2.10 m (6' 11"), 2.50 m (8' 2"), 3.00 m (9' 10") ARM

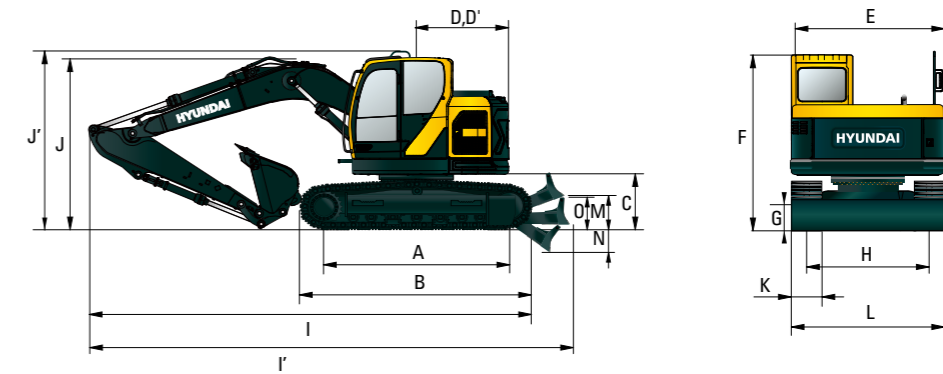

Unit : mm (ft-in)


A Tumbler Distance	3,090 (10' 2")
B Overall Length of Crawler	3,836 (12' 7")
*C Ground Clearance of Counter Weight	918 (3' 0")
**D Tail Swing Radius	1,530 (5' 0")
**D' Rear-End Length	1,530 (5' 0")
E Overall Width of Upper Structure	2,484 (8' 2")
*F Overall Height of Cab	2,835 (9' 4")
*G Min. Ground Clearance	282 (0' 11")
H Track gauge	1,990 (6' 6")
*J Overall Height of Guardrail	3,105 (10' 2")

* This figure includes the size of grousers.
** STD counterweight.
*** With dozer blade.

Boom Length	4,600 (15' 1")				4,100 (13' 5")
Arm Length	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")	1,900 (6' 3")	
I Overall Length	6,990 (22' 11")	6,965 (22' 10")	6,885 (22' 7")	6,490 (21' 4")	
***I Overall Length	7,425 (24' 4")	7,400 (24' 3")	7,320 (24' 0")	6,925 (22' 9")	
*J Overall Height of Boom	2,895 (9' 6")	2,925 (9' 7")	3,260 (10' 8")	3,005 (9' 10")	
K Track Shoe Width	500 (20")	600 (24")	700 (28")		
L Overall Width	2,490 (8' 2")	2,590 (8' 6")	2,690 (8' 10")		
***M Ground clearance of blade up					423 (1' 5")
***N Depth of blade down					430 (1' 5")
***O Height of blade					575 (1' 11")

HX145A LCR / HX145A LCRD MONO BOOM WORKING RANGE

Unit : mm (ft-in)

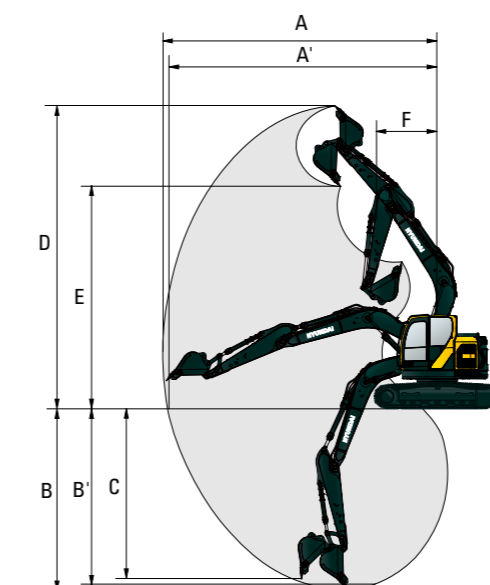


Boom Length	4,600 (15' 1")				4,100 (13' 5")
Arm Length	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")	1,900 (6' 3")	
A Max. Digging Reach	7,890 (25' 11")	8,300 (27' 3")	8,765 (28' 9")	7,210 (23' 8")	
A' Max. Digging Reach on Ground	7,740 (25' 5")	8,160 (26' 9")	8,630 (28' 4")	7,040 (23' 1")	
B Max. Digging Depth	5,040 (16' 6")	5,440 (17' 10")	5,940 (19' 6")	4,375 (14' 4")	
B' Max. Digging Depth (8' Level)	4,800 (15' 9")	5,230 (17' 2")	5,760 (18' 11")	4,130 (13' 7")	
C Max. Vertical Wall Digging Depth	4,590 (15' 1")	4,990 (16' 4")	5,490 (18' 0")	3,930 (12' 11")	
D Max. Digging Height	8,990 (29' 6")	9,370 (30' 9")	9,750 (32' 0")	8,395 (27' 7")	
E Max. Dumping Height	6,500 (21' 4")	6,880 (22' 7")	7,255 (23' 10")	5,900 (19' 4")	
F Min. Swing Radius	2,100 (6' 11")	2,050 (6' 9")	2,330 (7' 8")	2,010 (6' 7")	

DIMENSIONS & WORKING RANGE

HX145A LCR / HX145A LCRD 2-PIECE BOOM DIMENSIONS

4.9 m (16' 1") 2-Piece BOOM and 2.1 m (6' 11"), 2.5 m (8' 2") ARM

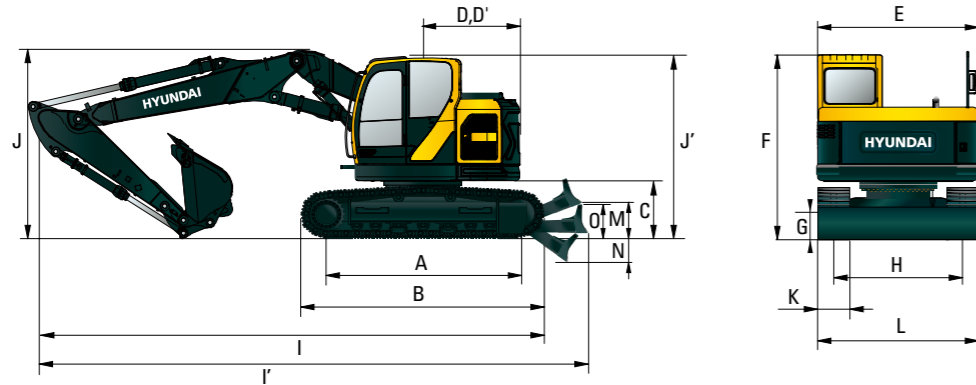

Unit : mm (ft-in)


A Tumbler Distance	3,090 (10' 2")	Boom Length		4,900 (16' 1")	
B Overall Length of Crawler	3,836 (12' 7")	Arm Length	2,100 (6' 11")	2,500 (8' 2")	
*C Ground Clearance of Counter Weight	918 (3' 0")	I Overall Length	7,310 (24' 0")	7,290 (23' 11")	
D Tail Swing Radius	1,530 (5' 0")	*I Overall Length	7,645 (25' 1")	7,625 (25' 0")	
**D' Rear-End Length	1,530 (5' 0")	*J Overall Height of Boom	2,660 (8' 9")	2,670 (8' 9")	
E Overall Width of Upper Structure	2,484 (8' 2")	K Track shoe width	500 (20")	600 (24")	700 (28")
*F Overall Height of Cab	2,835 (9' 4")	L Overall Width	2,490 (8' 2")	2,590 (8' 6")	2,690 (8' 10")
*G Min. Ground Clearance	282 (0' 11")	***M Ground clearance of blade up	423 (1' 5")		
H Track gauge	1,990 (6' 6")	***N Depth of blade down	430 (1' 5")		
*J' Overall Height of Guardrail	3,105 (10' 2")	***O Height of blade	575 (1' 11")		

* This figure includes the size of grousers.
 ** STD counterweight.
 *** With dozer blade.

DIMENSIONS & WORKING RANGE

HX145A LCR HW MONO BOOM DIMENSIONS

4.10 m (13' 5"), 4.60 m (15' 1") BOOM and 1.90 m (6' 3"), 2.10 m (6' 11"), 2.50 m (8' 2"), 3.00 m (9' 10") ARM

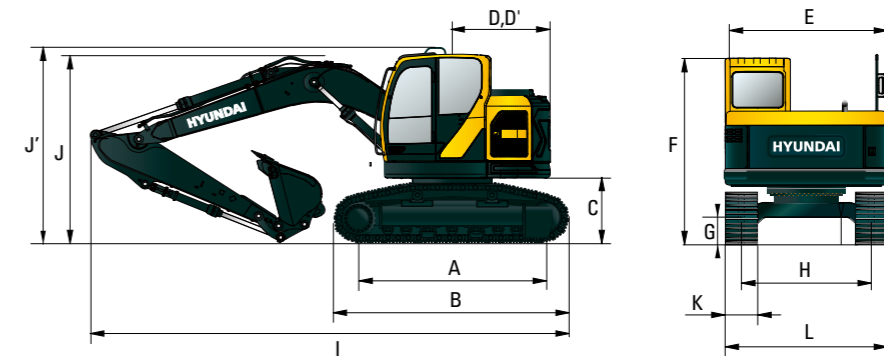


Unit : mm (ft-in)

A Tumbler Distance	3,030 (9' 11")	Boom Length		4,600 (15' 1")	
B Overall Length of Crawler	3,820 (12' 6")	Arm Length	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
*C Ground Clearance of Counter Weight	1,193 (3' 11")	I Overall Length	6,990 (22' 11")	6,965 (22' 10")	6,885 (22' 7")
**D Tail Swing Radius	1,530 (5' 0")	*J Overall Height of Boom	2,940 (9' 8")	2,930 (9' 7")	3,275 (10' 9")
**D' Rear-End Length	1,530 (5' 0")	K Track Shoe Width	700 (28")	800 (32")	
E Overall Width of Upper Structure	2,484 (8' 2")	L Overall Width	2,740 (9' 0")	2,840 (9' 4")	
*F Overall Height of Cab	3,155 (10' 4")				
*G Min. Ground Clearance	603 (2' 0")				
H Track gauge	2,040 (6' 8")				
*J' Overall Height of Guardrail	3,380 (11' 1")				

* This figure includes the size of grousers.
 ** STD counterweight.

HX145A LCR / HX145A LCRD 2-PIECE BOOM WORKING RANGE


Unit : mm (ft-in)

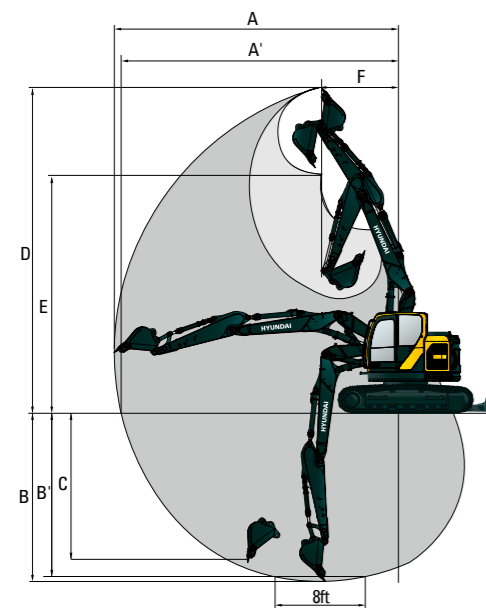

Boom Length	4,900 (16' 1")	
Arm Length	2,100 (6' 11")	2,500 (8' 2")
A Max. Digging Reach	8,270 (27' 2")	8,680 (28' 6")
A' Max. Digging Reach on Ground	8,130 (26' 8")	8,540 (28' 0")
B Max. Digging Depth	5,190 (17' 0")	5,600 (18' 4")
B' Max. Digging Depth (8' Level)	5,080 (16' 8")	5,490 (18' 0")
C Max. Vertical Wall Digging Depth	4,540 (14' 11")	5,000 (16' 5")
D Max. Digging Height	9,370 (30' 9")	9,750 (32' 0")
E Max. Dumping Height	6,880 (22' 7")	7,260 (23' 10")
F Min. Swing Radius	2,310 (7' 7")	2,250 (7' 5")

HX145A LCR HW MONO BOOM WORKING RANGE

Unit : mm (ft-in)

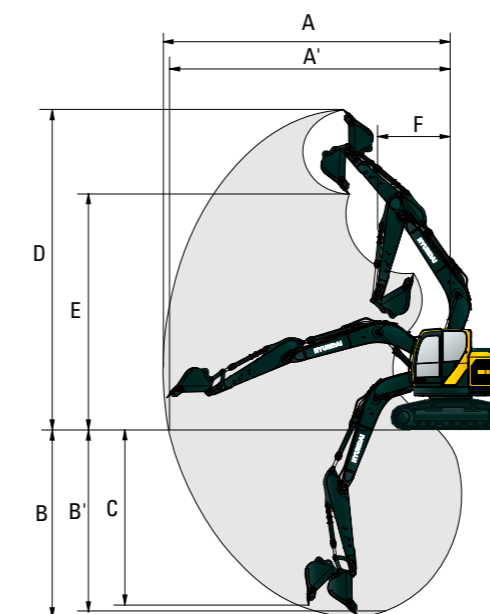


Boom Length	4,600 (15' 1")		
Arm Length	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
A Max. Digging Reach	7,890 (25' 11")	8,300 (27' 3")	8,765 (28' 9")
A' Max. Digging Reach on Ground	7,740 (25' 5")	8,160 (26' 9")	8,630 (28' 4")
B Max. Digging Depth	5,040 (16' 6")	5,440 (17' 10")	5,940 (19' 6")
B' Max. Digging Depth (8' Level)	4,800 (15' 9")	5,230 (17' 2")	5,760 (18' 11")
C Max. Vertical Wall Digging Depth	4,590 (15' 1")	4,990 (16' 4")	5,490 (18' 0")
D Max. Digging Height	8,990 (29' 6")	9,370 (30' 9")	9,750 (32' 0")
E Max. Dumping Height	6,500 (21' 4")	6,880 (22' 7")	7,255 (23' 10")
F Min. Swing Radius	2,100 (6' 11")	2,050 (6' 9")	2,330 (7' 8")

DIMENSIONS & WORKING RANGE

HX145A LCR HW 2-PIECE BOOM DIMENSIONS

4.9 m (16' 1") 2-Piece BOOM and 2.1 m (6' 11"), 2.5 m (8' 2") ARM

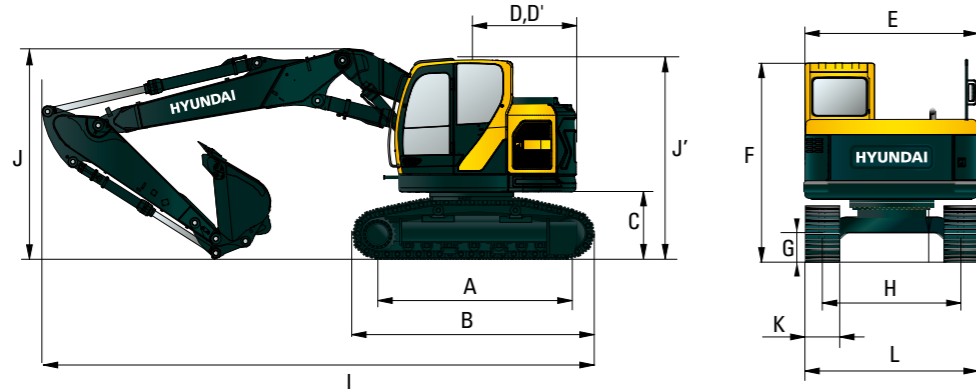


Unit : mm (ft-in)

A Tumbler Distance	3,030 (9' 11")	Boom Length	4,900 (16' 1")	
B Overall Length of Crawler	3,820 (12' 6")	Arm Length	2,100 (6' 11")	2,500 (8' 2")
*C Ground Clearance of Counter Weight	1,193 (3' 11")	I Overall Length	7,310 (24' 0")	7,290 (23' 11")
**D Tail Swing Radius	1,530 (5' 0")	*J Overall Height of Boom	2,785 (9' 2")	2,790 (9' 2")
**D' Rear-End Length	1,530 (5' 0")	K Track shoe width	700 (28")	800 (32")
E Overall Width of Upper Structure	2,484 (8' 2")	L Overall Width	2,740 (9' 0")	2,840 (9' 4")
*F Overall Height of Cab	3,155 (10' 4")			
*G Min. Ground Clearance	603 (2' 0")			
H Track gauge	2,040 (6' 8")			
*J' Overall Height of Guardrail	3,380 (11' 1")			

* This figure includes the size of grouser.
** STD counterweight.

HX145A LCR HW 2-PIECE BOOM WORKING RANGE

Unit : mm (ft-in)

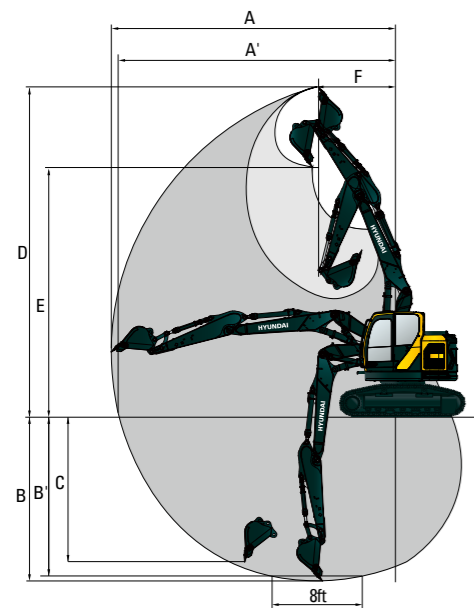

Boom Length	4,900 (16' 1")	
Arm Length	2,100 (6' 11")	2,500 (8' 2")
A Max. Digging Reach	8,270 (27' 2")	8,680 (28' 6")
A' Max. Digging Reach on Ground	8,130 (26' 8")	8,540 (28' 0")
B Max. Digging Depth	5,190 (17' 0")	5,600 (18' 4")
B' Max. Digging Depth (8' Level)	5,080 (16' 8")	5,490 (18' 0")
C Max. Vertical Wall Digging Depth	4,540 (14' 11")	5,000 (16' 5")
D Max. Digging Height	9,370 (30' 9")	9,750 (32' 0")
E Max. Dumping Height	6,880 (22' 7")	7,260 (23' 10")
F Min. Swing Radius	2,310 (7' 7")	2,250 (7' 5")

LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

HX145A LCR MONO BOOM

4.60 m (15' 1") boom, 2.10 m (6' 11") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe without Dozer.

Lift-point height (m/ft)	Lift-point radius								At max. reach		
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach	
7.5m 24.6ft	kg lb								*4,670 *10,300	*4,670 *10,300	2.66 (8.7)
6.0m 19.7ft	kg lb		*4,980 *10,980	*4,980 *10,980	*4,410 *9,720	3,760 8,290			*3,370 *7,430	3,310 7,300	4.83 (15.9)
4.5m 14.8ft	kg lb		*5,280 *11,640	*5,280 *11,640	*4,770 *10,520	3,710 8,180			*3,070 *6,770	2,370 5,220	5.91 (19.4)
3.0m 9.8ft	kg lb		*7,880 *17,370	6,570 14,480	*5,440 *11,990	3,520 7,760	3,750 8,270	2,270 5,000	*3,040 *6,700	2,000 4,410	6.47 (21.2)
1.5m 4.9ft	kg lb				5,700 12,570	3,300 7,280	3,660 8,070	2,180 4,810	3,130 6,900	1,870 4,120	6.65 (21.8)
0.0m 0.0ft	kg lb		*6,200 *13,670	5,700 12,570	5,530 12,190	3,150 6,940	3,580 7,890	2,120 4,670	3,210 7,080	1,910 4,210	6.47 (21.2)
-1.5m -4.9ft	kg lb	*5,160 *11,380	*5,160 *11,380	*8,280 *18,250	5,710 12,590	5,480 12,080	3,110 6,860		3,640 8,020	2,150 4,740	5.92 (19.4)
-3.0m -9.8ft	kg lb			*6,010 *13,250	5,840 12,870	*4,130 *9,110	3,180 7,010		*3,520 *7,760	2,880 6,350	4.86 (15.9)

4.60 m (15' 1") boom, 2.10 m (6' 11") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe Dozer up.

Lift-point height (m/ft)	Lift-point radius								At max. reach		
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach	
7.5m 24.6ft	kg lb								*4,670 *10,300	*4,670 *10,300	2.66 (8.7)
6.0m 19.7ft	kg lb		*4,980 *10,980	*4,980 *10,980	*4,410 *9,720	4,010 8,840			*3,370 *7,430	*3,370 *7,430	4.83 (15.9)
4.5m 14.8ft	kg lb		*5,280 *11,640	*5,280 *11,640	*4,770 *10,520	3,960 8,730			*3,070 *6,770	2,550 5,620	5.91 (19.4)
3.0m 9.8ft	kg lb		*7,880 *17,370	7,010 15,450	*5,440 *11,990	3,770 8,310	3,820 8,420	2,440 5,380	*3,040 *6,700	2,160 4,760	6.47 (21.2)
1.5m 4.9ft	kg lb				5,810 12,810	3,540 7,800	3,730 8,220	2,360 5,200	3,190 7,030	2,030 4,480	6.65 (21.8)
0.0m 0.0ft	kg lb		*6,200 *13,670	6,140 13,540	5,640 12,430	3,400 7,500	3,660 8,070	2,290 5,050	3,280 7,230	2,060 4,540	6.47 (21.2)
-1.5m -4.9ft	kg lb	*5,160 *11,380	*5,160 *11,380	*8,280 *18,250	6,150 13,560	5,590 12,320	3,350 7,390		3,720 8,200	2,330 5,140	5.92 (19.4)
-3.0m -9.8ft	kg lb			*6,010 *13,250	*6,010 *13,250	*4,130 *9,110	3,430 7,560		*3,520 *7,760	3,110 6,860	4.86 (15.9)

4.60 m (15' 1") boom, 2.10 m (6' 11") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe Dozer down.


Lift-point height (m/ft)	Lift-point radius								At max. reach		
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach	
7.5m 24.6ft	kg lb								*4,670 *10,300	*4,670 *10,300	2.66 (8.7)
6.0m 19.7ft	kg lb		*4,980 *10,980	*4,980 *10,980	*4,410 *9,720	4,010 8,840			*3,370 *7,430	*3,370 *7,430	4.83 (15.9)
4.5m 14.8ft	kg lb		*5,280 *11,640	*5,280 *11,640	*4,770 *10,520	3,960 8,730			*3,070 *6,770	2,550 5,620	5.91 (19.4)
3.0m 9.8ft	kg lb		*7,880 *17,370	7,010 15,450	*5,440 *11,990	3,770 8,310	*4,450 *9,810	2,440 5,380	*3,040 *6,700	2,160 4,760	6.47 (21.2)
1.5m 4.9ft	kg lb				*6,150 *13,560	3,540 7,800	*4,660 *10,270	2,360 5,200	*3,210 *7,080	2,030 4,480	6.65 (21.8)
0.0m 0.0ft	kg lb		*6,200 *13,670	6,140 13,540	*6,370 *14,040	3,400 7,500	*4,630 *10,210	2,290 5,050	*3,610 *7,960	2,060 4,540	6.47 (21.2)
-1.5m -4.9ft	kg lb	*5,160 *11,380	*5,160 *11,380	*8,280 *18,250	6,150 13,560	5,830 12,850	3,350 7,390		*4,010 *8,840	2,330 5,140	5.92 (19.4)
-3.0m -9.8ft	kg lb			*6,010 *13,250	*6,010 *13,250	*4,130 *9,110	3,430 7,560		*3,520 *7,760	3,110 6,860	4.86 (15.9)

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3 | The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4 | (*) indicates load limited by hydraulic capacity.



LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

Rating over-front Rating over-side or 360 degree

HX145A LCR MONO BOOM

4.60 m (15' 1") boom, 2.10 m (6' 11") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe without Dozer.

Lift-point height (m/ft)	Lift-point radius								At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach		
7.5m 24.6ft	kg									*4,670	*4,670	2.66
	lb									*10,300	*10,300	(8.7)
6.0m 19.7ft	kg			*4,980	*4,980	*4,410	4,010			*3,370	*3,370	4.83
	lb			*10,980	*10,980	*9,720	8,840			*7,430	*7,430	(15.9)
4.5m 14.8ft	kg			*5,280	*5,280	*4,770	3,970			*3,070	2,550	5.91
	lb			*11,640	*11,640	*10,520	8,750			*6,770	5,620	(19.4)
3.0m 9.8ft	kg			*7,880	7,020	*5,440	3,780	3,990	2,450	*3,040	2,170	6.47
	lb			*17,370	15,480	*11,990	8,330	8,800	5,400	*6,700	4,780	(21.2)
1.5m 4.9ft	kg					6,060	3,550	3,890	2,360	*3,210	2,030	6.65
	lb					13,360	7,830	8,580	5,200	*7,080	4,480	(21.8)
0.0m 0.0ft	kg			*6,200	6,160	5,890	3,400	3,820	2,290	3,430	2,070	6.47
	lb			*13,670	13,580	12,990	7,500	8,420	5,050	7,560	4,560	(21.2)
-1.5m -4.9ft	kg	*5,160	*5,160	*8,280	6,170	*5,830	3,360			3,890	2,330	5.92
	lb	*11,380	*11,380	*18,250	13,600	*12,850	7,410			8,580	5,140	(19.4)
-3.0m -9.8ft	kg			*6,010	*6,010	*4,130	3,440			*3,520	3,110	4.86
	lb			*13,250	*13,250	*9,110	7,580			*7,760	6,860	(15.9)

4.60 m (15' 1") boom, 2.10 m (6' 11") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe Dozer up.

Lift-point height (m/ft)	Lift-point radius								At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach		
7.5m 24.6ft	kg									*4,670	*4,670	2.66
	lb									*10,300	*10,300	(8.7)
6.0m 19.7ft	kg			*4,980	*4,980	*4,410	4,260			*3,370	*3,370	4.83
	lb			*10,980	*10,980	*9,720	9,390			*7,430	*7,430	(15.9)
4.5m 14.8ft	kg			*5,280	*5,280	*4,770	4,220			*3,070	2,730	5.91
	lb			*11,640	*11,640	*10,520	9,300			*6,770	6,020	(19.4)
3.0m 9.8ft	kg			*7,880	7,460	*5,440	4,030	4,060	2,620	*3,040	2,330	6.47
	lb			*17,370	16,450	*11,990	8,880	8,950	5,780	*6,700	5,140	(21.2)
1.5m 4.9ft	kg					*6,150	3,800	3,970	2,540	*3,210	2,180	6.65
	lb					*13,560	8,380	8,750	5,600	*7,080	4,810	(21.8)
0.0m 0.0ft	kg			*6,200	*6,200	6,000	3,650	3,900	2,470	3,490	2,230	6.47
	lb			*13,670	*13,670	13,230	8,050	8,600	5,450	7,690	4,920	(21.2)
-1.5m -4.9ft	kg	*5,160	*5,160	*8,280	6,610	*5,830	3,610			3,960	2,510	5.92
	lb	*11,380	*11,380	*18,250	14,570	*12,850	7,960			8,730	5,530	(19.4)
-3.0m -9.8ft	kg			*6,010	*6,010	*4,130	3,690			*3,520	3,340	4.86
	lb			*13,250	*13,250	*9,110	8,140			*7,760	7,360	(15.9)

4.60 m (15' 1") boom, 2.10 m (6' 11") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe Dozer down.


Lift-point height (m/ft)	Lift-point radius								At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach		
7.5m 24.6ft	kg									*4,670	*4,670	2.66
	lb									*10,300	*10,300	(8.7)
6.0m 19.7ft	kg			*4,980	*4,980	*4,410	4,260			*3,370	*3,370	4.83
	lb			*10,980	*10,980	*9,720	9,390			*7,430	*7,430	(15.9)
4.5m 14.8ft	kg			*5,280	*5,280	*4,770	4,220			*3,070	2,730	5.91
	lb			*11,640	*11,640	*10,520	9,300			*6,770	6,020	(19.4)
3.0m 9.8ft	kg			*7,880	7,460	*5,440	4,030	*4,450	2,620	*3,040	2,330	6.47
	lb			*17,370	16,450	*11,990	8,880	*9,810	5,780	*6,700	5,140	(21.2)
1.5m 4.9ft	kg					*6,150	3,800	*4,660	2,540	*3,210	2,180	6.65
	lb					*13,560	8,380	*10,270	5,600	*7,080	4,810	(21.8)
0.0m 0.0ft	kg			*6,200	*6,200	*6,370	3,650	*4,630	2,470	*3,610	2,230	6.47
	lb			*13,670	*13,670	*14,040	8,050	*10,210	5,450	*7,960	4,920	(21.2)
-1.5m -4.9ft	kg	*5,160	*5,160	*8,280	6,610	*5,830	3,610			*4,010	2,510	5.92
	lb	*11,380	*11,380	*18,250	14,570	*12,850	7,960			*8,840	5,530	(19.4)
-3.0m -9.8ft	kg			*6,010	*6,010	*4,130	3,690			*3,520	3,340	4.86
	lb			*13,250	*13,250	*9,110	8,140			*7,760	7,360	(15.9)

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3 | The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).

4 | (*) indicates load limited by hydraulic capacity.



HX145A LCR MONO BOOM

4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe without Dozer.

Lift-point height (m/ft)	Lift-point radius								At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach		
7.5m 24.6ft	kg									*4,030	*4,030	3.58
	lb									*8,880	*8,880	(11.7)
6.0m 19.7ft	kg			*3,800	*3,800					*2,260	*2,260	5.39
	lb			*8,380	*8,380					*4,980	*4,980	(17.7)
4.5m 14.8ft	kg			*3,920	*3,920	*4,290	3,760	*3,290	2,340	*2,060	*2,060	6.37
	lb			*8,640	*8,640	*9,460	8,290	*7,250	5,160	*4,540	*4,540	(20.9)
3.0m 9.8ft	kg			*7,140	6,730	*5,120	3,550	3,760	2,270	*2,030	1,800	6.89
	lb			*15,740	14,840	*11,290	7,830	8,290	5,000	*4,480	3,970	(22.6)
1.5m 4.9ft	kg					*8,300	5,990	5,720	3,310	3,650	2,170	7.06
	lb					*18,300	13,210	12,610	7,300	8,050	4,780	(23.1)
0.0m 0.0ft	kg			*6,700	5,670	5,510	3,130	3,560	2,090	*2,340	1,720	6.89
	lb			*14,770	12,500	12,150	6,900	7,850	4,610	*5,160	3,790	(22.6)
-1.5m -4.9ft	kg	*4,660	*4,660	*8,760	5,620	5,430	3,060	3,520	2,060	*2,800	1,900	6.38
	lb	*10,270	*10,270	*19,310	12,390	11,970	6,750	7,760	4,540	*6,170	4,190	(20.9)
-3.0m -9.8ft	kg			*6,790	5,720	*4,730	3,100			*3,410	2,430	5.41
	lb			*14,970	12,610	*10,430	6,830			*7,520	5,360	(17.7)

4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe Dozer up.

Lift-point height (m/ft)	Lift-point radius								At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach		
7.5m 24.6ft	kg									*4,030	*4,030	3.58
	lb									*8,880	*8,880	(11.7)
6.0m 19.7ft	kg			*3,800	*3,800					*2,260	*2,260	5.39
	lb			*8,380	*8,380					*4,980	*4,980	(17.7)
4.5m 14.8ft	kg			*3,920	*3,920	*4,290	4,010	*3,290	2,510	*2,060	*2,060	6.37
	lb			*8,640	*8,640	*9,460	8,840	*7,250	5,530	*4,540	*4,540	(20.9)
3.0m 9.8ft	kg			*7,140	*7,140	*5,120	3,800	3,840	2,450	*2,030	1,950	6.89
	lb			*15,740	*15,740	*11,290	8,380	8,470	5,400	*4,480	4,300	(22.6)
1.5m 4.9ft	kg					*8,300	6,430	5,830	3,560	3,720	2,350	7.06
	lb					*18,300	14,180	12,850	7,850	8,200	5,180	(23.1)
0.0m 0.0ft	kg			*6,700	6,110	5,630	3,380	3,630	2,260	*2,340	1,860	6.89
	lb			*14,770	13,470	12,410	7,450	8,000	4,980	*5,160	4,100	(22.6)
-1.5m -4.9ft	kg	*4,660	*4,660	*8,760	6,070	5,540	3,310	3,600	2,230	*2,800	2,060	6.38
	lb	*10,270	*10,270	*19,310	13,380	12,210	7,300	7,940	4,920	*6,170	4,540	(20.9)
-3.0m -9.8ft	kg			*6,790	6,170	*4,730	3,350			*3,410	2,630	5.41
	lb			*14,970	13,600	*10,430	7,390			*7,520	5,800	(17.7)

4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe Dozer down.

LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

HX145A LCR MONO BOOM

4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe without Dozer.

Lift-point height (m/ft)	Lift-point radius								At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach		
7.5m 24.6ft	kg		*4,030	*4,030					*2,930	*2,930	3.58	
	lb		*8,880	*8,880					*6,460	*6,460	(11.7)	
6.0m 19.7ft	kg				*3,800	*3,800			*2,260	*2,260	5.39	
	lb				*8,380	*8,380			*4,980	*4,980	(17.7)	
4.5m 14.8ft	kg		*3,920	*3,920	*4,290	4,010	*3,290	2,520	*2,060	*2,060	6.37	
	lb		*8,640	*8,640	*9,460	8,840	*7,250	5,560	*4,540	*4,540	(20.9)	
3.0m 9.8ft	kg		*7,140	*7,140	*5,120	3,810	4,000	2,450	*2,030	1,960	6.89	
	lb		*15,740	*15,740	*11,290	8,400	8,820	5,400	*4,480	4,320	(22.6)	
1.5m 4.9ft	kg		*8,300	6,450	*5,940	3,560	3,890	2,350	*2,120	1,840	7.06	
	lb		*18,300	14,220	*13,100	7,850	8,580	5,180	*4,670	4,060	(23.1)	
0.0m 0.0ft	kg		*6,700	6,130	5,870	3,390	3,800	2,270	*2,340	1,870	6.89	
	lb		*14,770	13,510	12,940	7,470	8,380	5,000	*5,160	4,120	(22.6)	
-1.5m -4.9ft	kg	*4,660	*4,660	*8,760	6,080	5,790	3,320	3,760	2,240	*2,800	2,070	6.38
	lb	*10,270	*10,270	*19,310	13,400	12,760	7,320	8,290	4,940	*6,170	4,560	(20.9)
-3.0m -9.8ft	kg	*8,720	*8,720	*6,790	6,180	*4,730	3,360		*3,410	2,630	5.41	
	lb	*19,220	*19,220	*14,970	13,620	*10,430	7,410		*7,520	5,800	(17.7)	

4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe Dozer up.

Lift-point height (m/ft)	Lift-point radius								At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach		
7.5m 24.6ft	kg		*4,030	*4,030					*2,930	*2,930	3.58	
	lb		*8,880	*8,880					*6,460	*6,460	(11.7)	
6.0m 19.7ft	kg				*3,800	*3,800			*2,260	*2,260	5.39	
	lb				*8,380	*8,380			*4,980	*4,980	(17.7)	
4.5m 14.8ft	kg		*3,920	*3,920	*4,290	4,260	*3,290	2,690	*2,060	*2,060	6.37	
	lb		*8,640	*8,640	*9,460	9,390	*7,250	5,930	*4,540	*4,540	(20.9)	
3.0m 9.8ft	kg		*7,140	*7,140	*5,120	4,060	4,080	2,630	*2,030	*2,030	6.89	
	lb		*15,740	*15,740	*11,290	8,950	8,990	5,800	*4,480	*4,480	(22.6)	
1.5m 4.9ft	kg		*8,300	6,890	*5,940	3,810	3,960	2,530	*2,120	1,980	7.06	
	lb		*18,300	15,190	*13,100	8,400	8,730	5,580	*4,670	4,370	(23.1)	
0.0m 0.0ft	kg		*6,700	6,570	5,990	3,630	3,870	2,440	*2,340	2,010	6.89	
	lb		*14,770	14,480	13,210	8,000	8,530	5,380	*5,160	4,430	(22.6)	
-1.5m -4.9ft	kg	*4,660	*4,660	*8,760	6,520	5,910	3,560	3,840	2,410	*2,800	2,230	6.38
	lb	*10,270	*10,270	*19,310	14,370	13,030	7,850	8,470	5,310	*6,170	4,920	(20.9)
-3.0m -9.8ft	kg	*8,720	*8,720	*6,790	6,620	*4,730	3,610		*3,410	2,830	5.41	
	lb	*19,220	*19,220	*14,970	14,590	*10,430	7,960		*7,520	6,240	(17.7)	

4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe Dozer down.


Lift-point height (m/ft)	Lift-point radius								At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach		
7.5m 24.6ft	kg		*4,030	*4,030					*2,930	*2,930	3.58	
	lb		*8,880	*8,880					*6,460	*6,460	(11.7)	
6.0m 19.7ft	kg				*3,800	*3,800			*2,260	*2,260	5.39	
	lb				*8,380	*8,380			*4,980	*4,980	(17.7)	
4.5m 14.8ft	kg		*3,920	*3,920	*4,290	4,260	*3,290	2,690	*2,060	*2,060	6.37	
	lb		*8,640	*8,640	*9,460	9,390	*7,250	5,930	*4,540	*4,540	(20.9)	
3.0m 9.8ft	kg		*7,140	*7,140	*5,120	4,060	*4,250	2,630	*2,030	*2,030	6.89	
	lb		*15,740	*15,740	*11,290	8,950	*9,370	5,800	*4,480	*4,480	(22.6)	
1.5m 4.9ft	kg		*8,300	6,890	*5,940	3,810	*4,540	2,530	*2,120	1,980	7.06	
	lb		*18,300	15,190	*13,100	8,400	*10,010	5,580	*4,670	4,370	(23.1)	
0.0m 0.0ft	kg		*6,700	6,570	*6,320	3,630	*4,640	2,440	*2,340	2,010	6.89	
	lb		*14,770	14,480	*13,930	8,000	*10,230	5,380	*5,160	4,430	(22.6)	
-1.5m -4.9ft	kg	*4,660	*4,660	*8,760	6,520	*6,000	3,560	*4,240	2,410	*2,800	2,230	6.38
	lb	*10,270	*10,270	*19,310	14,370	*13,230	7,850	*9,350	5,310	*6,170	4,920	(20.9)
-3.0m -9.8ft	kg	*8,720	*8,720	*6,790	6,620	*4,730	3,610		*3,410	2,830	5.41	
	lb	*19,220	*19,220	*14,970	14,590	*10,430	7,960		*7,520	6,240	(17.7)	

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3 | The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).

4 | (*) indicates load limited by hydraulic capacity.



Rating over-front Rating over-side or 360 degree

HX145A LCR MONO BOOM

4.60 m (15' 1") boom, 3.00 m (9' 10") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe without Dozer.

Lift-point height (m/ft)	Lift-point radius										At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity	Reach		
7.5m 24.6ft	kg										*2,310	*2,310	4.43	
	lb										*5,090	*5,090	(14.5)	
6.0m 19.7ft	kg					*3,270	*3,270				*1,900	*1,900	5.98	
	lb					*7,210	*7,210				*4,190	*4,190	(19.6)	
4.5m 14.8ft	kg					*3,440	*3,440	*3,210	2,390		*1,760	*1,760	6.88	
	lb					*7,580	*7,580	*7,080	5,270		*3,880	*3,880	(22.6)	
3.0m 9.8ft	kg			*5,080	*5,080	*4,580	3,630	3,800	2,310		*1,740	1,630	7.36	
	lb			*11,200	*11,200	*10,100	8,000	8,380	5,090		*3,840	3,590	(24.2)	
1.5m 4.9ft	kg			*8,710	6,190	*5,650	3,370	3,670	2,190	*1,910	1,540	*1,810	1,530	7.52
	lb			*19,200	13,650	*12,460	7,430	8,090	4,830	*4,210	3,400	*3,990	3,370	(24.7)
0.0m 0.0ft	kg			*7,520	5,720	5,540	3,150	3,560	2,090			*1,990	1,550	7.37
	lb			*16,580	12,610	12,210	6,940	7,850	4,610			*4,390	3,420	(24.2)
-1.5m -4.9ft	kg	*4,220	*4,220	*9,240	5,600	5,420	3,040	3,500	2,040			*2,340	1,690	6.89
	lb	*9,300	*9,300	*20,370	12,350	11,950	6,700	7,720	4,500			*5,160	3,730	(22.6)
-3.0m -9.8ft	kg	*7,330	*7,330	*7,660	5,640	*5,270	3,050	*3,120	2,070			*3,100	2,070	6.00
	lb	*16,160	*16,160	*16,890	12,430	*11,620	6,720	*6,880	4,560			*6,830	4,560	(19.7)
-4.5m -14.8ft	kg			*4,550	*4,550							*2,630	*2,630	4.47
	lb			*10,030	*10,030							*5,800	*5,800	(14.7)

4.60 m (15' 1") boom, 3.00 m (9' 10") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe Dozer up.

Lift-point height (m/ft)	Lift-point radius										At max. reach		
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity	Reach	
7.5m 24.6ft	kg										*2,310	*2,310	4.43
	lb										*5,090	*5,090	(14.5)
6.0m 19.7ft	kg					*3,270	*3,270				*1,900	*1,900	5.98
	lb					*7,210	*7,210				*4,190	*4,190	(19.6)
4.5m 14.8ft	kg					*3,440	*3,440	*3,210	2,560		*1,760	*1,760	6.88
	lb					*7,580	*7,580	*7,080	5,640		*3,880	*3,880	(22.6)
3.0m 9.8ft	kg			*5,080	*5,080	*4,580	3,880	3,880	2,480		*1,740	*1,740	7.36
	lb			*11,200	*11,200	*10,100	8,550	8,550	5,470		*3,840	*3,840	(24.2)
1.5													

LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

Rating over-front Rating over-side or 360 degree

HX145A LCR MONO BOOM

4.60 m (15' 1") boom, 3.00 m (9' 10") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe without Dozer.

Lift-point height (m/ft)	Lift-point radius										At max. reach		
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity	Reach	
													m (ft)
7.5m 24.6ft	kg										*2,310	*2,310	4.43
	lb										*5,090	*5,090	(14.5)
6.0m 19.7ft	kg			*3,270	*3,270						*1,900	*1,900	5.98
	lb			*7,210	*7,210						*4,190	*4,190	(19.6)
4.5m 14.8ft	kg			*3,440	*3,440	*3,210	2,570				*1,760	*1,760	6.88
	lb			*7,580	*7,580	*7,080	5,670				*3,880	*3,880	(22.6)
3.0m 9.8ft	kg		*5,080	*5,080	*4,580	3,890	*3,940	2,490			*1,740	*1,740	7.36
	lb		*11,200	*11,200	*10,100	8,580	*8,690	5,490			*3,840	*3,840	(24.2)
1.5m 4.9ft	kg		*8,710	6,650	*5,650	3,620	3,910	2,370	*1,910	1,680	*1,810	1,670	7.52
	lb		*19,200	14,660	*12,460	7,980	8,620	5,220	*4,210	3,700	*3,990	3,680	(24.7)
0.0m 0.0ft	kg		*7,520	6,180	5,910	3,410	3,800	2,270			*1,990	1,690	7.37
	lb		*16,580	13,620	13,030	7,520	8,380	5,000			*4,390	3,730	(24.2)
-1.5m -4.9ft	kg	*4,220	*4,220	*9,240	6,050	5,780	3,300	3,740	2,210		*2,340	1,840	6.89
	lb	*9,300	*9,300	*20,370	13,340	12,740	7,280	8,250	4,870		*5,160	4,060	(22.6)
-3.0m -9.8ft	kg	*7,330	*7,330	*7,660	6,100	*5,270	3,300	*3,120	2,250		*3,100	2,240	6.00
	lb	*16,160	*16,160	*16,890	13,450	*11,620	7,280	*6,880	4,960		*6,830	4,940	(19.7)
-4.5m -14.8ft	kg			*4,550	*4,550						*2,630	*2,630	4.47
	lb			*10,030	*10,030						*5,800	*5,800	(14.7)

4.60 m (15' 1") boom, 3.00 m (9' 10") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe Dozer up.

Lift-point height (m/ft)	Lift-point radius										At max. reach		
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity	Reach	
													m (ft)
7.5m 24.6ft	kg										*2,310	*2,310	4.43
	lb										*5,090	*5,090	(14.5)
6.0m 19.7ft	kg			*3,270	*3,270						*1,900	*1,900	5.98
	lb			*7,210	*7,210						*4,190	*4,190	(19.6)
4.5m 14.8ft	kg			*3,440	*3,440	*3,210	2,740				*1,760	*1,760	6.88
	lb			*7,580	*7,580	*7,080	6,040				*3,880	*3,880	(22.6)
3.0m 9.8ft	kg		*5,080	*5,080	*4,580	4,140	*3,940	2,660			*1,740	*1,740	7.36
	lb		*11,200	*11,200	*10,100	9,130	*8,690	5,860			*3,840	*3,840	(24.2)
1.5m 4.9ft	kg		*8,710	7,090	*5,650	3,870	3,990	2,550	*1,910	1,810	*1,810	1,800	7.52
	lb		*19,200	15,630	*12,460	8,530	8,800	5,620	*4,210	3,990	*3,990	3,970	(24.7)
0.0m 0.0ft	kg		*7,520	6,620	6,020	3,660	3,880	2,440			*1,990	1,820	7.37
	lb		*16,580	14,590	13,270	8,070	8,550	5,380			*4,390	4,010	(24.2)
-1.5m -4.9ft	kg	*4,220	*4,220	*9,240	6,490	5,890	3,550	3,810	2,390		*2,340	1,990	6.89
	lb	*9,300	*9,300	*20,370	14,310	12,990	7,830	8,400	5,270		*5,160	4,390	(22.6)
-3.0m -9.8ft	kg	*7,330	*7,330	*7,660	6,540	*5,270	3,550	*3,120	2,420		*3,100	2,420	6.00
	lb	*16,160	*16,160	*16,890	14,420	*11,620	7,830	*6,880	5,340		*6,830	5,340	(19.7)
-4.5m -14.8ft	kg			*4,550	*4,550						*2,630	*2,630	4.47
	lb			*10,030	*10,030						*5,800	*5,800	(14.7)

4.60 m (15' 1") boom, 3.00 m (9' 10") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe Dozer down.


Lift-point height (m/ft)	Lift-point radius										At max. reach		
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity	Reach	
													m (ft)
7.5m 24.6ft	kg										*2,310	*2,310	4.43
	lb										*5,090	*5,090	(14.5)
6.0m 19.7ft	kg			*3,270	*3,270						*1,900	*1,900	5.98
	lb			*7,210	*7,210						*4,190	*4,190	(19.6)
4.5m 14.8ft	kg			*3,440	*3,440	*3,210	2,740				*1,760	*1,760	6.88
	lb			*7,580	*7,580	*7,080	6,040				*3,880	*3,880	(22.6)
3.0m 9.8ft	kg		*5,080	*5,080	*4,580	4,140	*3,940	2,660			*1,740	*1,740	7.36
	lb		*11,200	*11,200	*10,100	9,130	*8,690	5,860			*3,840	*3,840	(24.2)
1.5m 4.9ft	kg		*8,710	7,090	*5,650	3,870	*4,380	2,550	*1,910	1,810	*1,810	1,800	7.52
	lb		*19,200	15,630	*12,460	8,530	*9,660	5,620	*4,210	3,990	*3,990	3,970	(24.7)
0.0m 0.0ft	kg		*7,520	6,620	*6,230	3,660	*4,600	2,440			*1,990	1,820	7.37
	lb		*16,580	14,590	*13,730	8,070	*10,140	5,380			*4,390	4,010	(24.2)
-1.5m -4.9ft	kg	*4,220	*4,220	*9,240	6,490	*6,170	3,550	*4,450	2,390		*2,340	1,990	6.89
	lb	*9,300	*9,300	*20,370	14,310	*13,600	7,830	*9,810	5,270		*5,160	4,390	(22.6)
-3.0m -9.8ft	kg	*7,330	*7,330	*7,660	6,540	*5,270	3,550	*3,120	2,420		*3,100	2,420	6.00
	lb	*16,160	*16,160	*16,890	14,420	*11,620	7,830	*6,880	5,340		*6,830	5,340	(19.7)
-4.5m -14.8ft	kg			*4,550	*4,550						*2,630	*2,630	4.47
	lb			*10,030	*10,030						*5,800	*5,800	(14.7)

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3 | The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4 | (*) indicates load limited by hydraulic capacity.



HX145A LCR 2-PIECE BOOM

4.90 m (16' 1") boom, 2.10 m (6' 11") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe.

Lift-point height (m/ft)	Lift-point radius						At max. reach			
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach		
									m (ft)	
7.5m 24.6ft	kg	*5,010	*5,010				*4,600	*4,600	3.52	
	lb	*11,050	*11,050				*10,140	*10,140	(11.5)	
6.0m 19.7ft	kg			*4,150	3,820		*3,580	2,820	5.35	
	lb			*9,150	8,420		*7,890	6,220	(17.5)	
4.5m 14.8ft	kg	*5,230	*5,230	*4,430	3,710	3,840	2,330	*3,290	2,110	6.33
	lb	*11,530	*11,530	*9,770	8,180	8,470	5,140	*7,250	4,650	(20.8)
3.0m 9.8ft	kg			*5,190	3,480	3,760	2,250	3,030	1,810	6.86
	lb			*11,440	7,670	8,290	4,960	6,680	3,990	(22.5)
1.5m 4.9ft	kg			5,660	3,220	3,640	2,150	2,870	1,690	7.03
	lb			12,480	7,100	8,020	4,740	6,330	3,730	(23.1)
0.0m 0.0ft	kg			5,480	3,070	3,560	2,070	2,930	1,720	6.86
	lb			12,080	6,770	7,850	4,560	6,460	3,790	(22.5)
-1.5m -4.9ft	kg	*7,730	5,610	5,440	3,030	3,540	2,050	3,280	1,910	6.35
	lb	*17,040	12,370	11,990	6,680	7,800	4,520	7,230	4,210	(20.8)
-3.0m -9.8ft	kg			*4,710	3,100					
	lb			*10,380	6,830					

4.9 m (16' 1") boom, 2.10 m (6' 11") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe Dozer up.

Lift-point height (m/ft)	Lift-point radius						At max. reach			
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity	Reach		
									m (ft)	
7.5m 24.6ft	kg	*5,010	*5,010				*4,600	*4,600	3.52	
	lb	*11,050	*11,050				*10,140	*10,140	(11.5)	
6.0m 19.7ft	kg			*4,150	4,060		*3,580	3,020	5.35	
	lb			*9,150	8,950		*7,890	6,660	(17.5)	
4.5m 14.8ft	kg	*5,230	*5,230	*4,430	3,960	3,920	2,500	*3,290	2,270	6.33
	lb	*11,530	*11,530	*9,770	8,730	8,640	5,510			









LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degree









 Rating over-front  Rating over-side or 360 degree

HX145A LCR 2-PIECE BOOM









4.90 m (16' 1") boom, 2.10 m (6' 11") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe.

Lift-point height (m/ft)		Lift-point radius						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach (m (ft))
										
7.5m	kg	*5,010	*5,010					*4,600	*4,600	3.52
24.6ft	lb	*11,050	*11,050					*10,140	*10,140	(11.5)
6.0m	kg			*4,150	4,070			*3,580	3,030	5.35
19.7ft	lb			*9,150	8,970			*7,890	6,680	(17.5)
4.5m	kg	*5,230	*5,230	*4,430	3,970	*3,970	2,510	*3,290	2,270	6.33
14.8ft	lb	*11,530	*11,530	*9,770	8,750	*8,750	5,530	*7,250	5,000	(20.8)
3.0m	kg			*5,190	3,730	4,000	2,430	3,230	1,960	6.86
9.8ft	lb			*11,440	8,220	8,820	5,360	7,120	4,320	(22.5)
1.5m	kg			*5,940	3,480	3,880	2,320	3,060	1,840	7.03
4.9ft	lb			*13,100	7,670	8,550	5,110	6,750	4,060	(23.1)
0.0m	kg			5,840	3,330	3,800	2,250	3,130	1,870	6.86
0.0ft	lb			12,870	7,340	8,380	4,960	6,900	4,120	(22.5)
-1.5m	kg	*7,730	6,070	5,800	3,290	3,780	2,230	3,500	2,080	6.35
-4.9ft	lb	*17,040	13,380	12,790	7,250	8,330	4,920	7,720	4,590	(20.8)
-3.0m	kg			*4,710	3,360					
-9.8ft	lb			*10,380	7,410					

4.9 m (16' 1") boom, 2.10 m (6' 11") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe Dozer up.

Lift-point height (m/ft)		Lift-point radius						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach (m (ft))
										
7.5m	kg	*5,010	*5,010					*4,600	*4,600	3.52
24.6ft	lb	*11,050	*11,050					*10,140	*10,140	(11.5)
6.0m	kg			*4,150	*4,150			*3,580	3,230	5.35
19.7ft	lb			*9,150	*9,150			*7,890	7,120	(17.5)
4.5m	kg	*5,230	*5,230	*4,430	4,220	*3,970	2,680	*3,290	2,440	6.33
14.8ft	lb	*11,530	*11,530	*9,770	9,300	*8,750	5,910	*7,250	5,380	(20.8)
3.0m	kg			*5,190	3,980	4,070	2,600	*3,250	2,110	6.86
9.8ft	lb			*11,440	8,770	8,970	5,730	*7,170	4,650	(22.5)
1.5m	kg			*5,940	3,730	3,960	2,500	3,120	1,980	7.03
4.9ft	lb			*13,100	8,220	8,730	5,510	6,880	4,370	(23.1)
0.0m	kg			5,950	3,580	3,870	2,420	3,200	2,020	6.86
0.0ft	lb			13,120	7,890	8,530	5,340	7,050	4,450	(22.5)
-1.5m	kg	*7,730	6,510	*5,890	3,540	3,850	2,400	3,570	2,240	6.35
-4.9ft	lb	*17,040	14,350	*12,990	7,800	8,490	5,290	7,870	4,940	(20.8)
-3.0m	kg			*4,710	3,610					
-9.8ft	lb			*10,380	7,960					

4.9 m (16' 1") boom, 2.10 m (6' 11") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe Dozer down.


Lift-point height (m/ft)		Lift-point radius						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach (m (ft))
										
7.5m	kg	*5,010	*5,010					*4,600	*4,600	3.52
24.6ft	lb	*11,050	*11,050					*10,140	*10,140	(11.5)
6.0m	kg			*4,150	*4,150			*3,580	3,230	5.35
19.7ft	lb			*9,150	*9,150			*7,890	7,120	(17.5)
4.5m	kg	*5,230	*5,230	*4,430	4,220	*3,970	2,680	*3,290	2,440	6.33
14.8ft	lb	*11,530	*11,530	*9,770	9,300	*8,750	5,910	*7,250	5,380	(20.8)
3.0m	kg			*5,190	3,980	*4,180	2,600	*3,250	2,110	6.86
9.8ft	lb			*11,440	8,770	*9,220	5,730	*7,170	4,650	(22.5)
1.5m	kg			*5,940	3,730	*4,470	2,500	*3,390	1,980	7.03
4.9ft	lb			*13,100	8,220	*9,850	5,510	*7,470	4,370	(23.1)
0.0m	kg			*6,230	3,580	*4,570	2,420	*3,740	2,020	6.86
0.0ft	lb			*13,730	7,890	*10,080	5,340	*8,250	4,450	(22.5)
-1.5m	kg	*7,730	6,510	*5,890	3,540	*4,230	2,400	*3,810	2,240	6.35
-4.9ft	lb	*17,040	14,350	*12,990	7,800	*9,330	5,290	*8,400	4,940	(20.8)
-3.0m	kg			*4,710	3,610					
-9.8ft	lb			*10,380	7,960					

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.









3 | The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4 | (*) indicates load limited by hydraulic capacity.











HX145A LCR 2-PIECE BOOM

4.90 m (16' 1") boom, 2.50 m (8' 2") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe.

Lift-point height (m/ft)		Lift-point radius						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach (m (ft))
										
7.5m	kg							*3,070	*3,070	4.28
24.6ft	lb							*6,770	*6,770	(14.0)
6.0m	kg			*3,770	*3,770			*2,480	2,430	5.87
19.7ft	lb			*8,310	*8,310			*5,470	5,360	(19.3)
4.5m	kg	*3,760	*3,760	*4,090	3,760	*3,700	2,350	*2,280	1,880	6.78
14.8ft	lb	*8,290	*8,290	*9,020	8,290	*8,160	5,180	*5,030	4,140	(22.3)
3.0m	kg	*7,110	6,580	*4,880	3,510	3,770	2,260	*2,240	1,630	7.27
9.8ft	lb	*15,670	14,510	*10,760	7,740	8,310	4,980	*4,940	3,590	(23.9)
1.5m	kg			5,680	3,240	3,640	2,140	*2,320	1,530	7.43
4.9ft	lb			12,520	7,140	8,020	4,720	*5,110	3,370	(24.4)
0.0m	kg	*3,870	*3,870	5,460	3,050	3,530	2,040	*2,520	1,550	7.28
0.0ft	lb	*8,530	*8,530	12,040	6,720	7,780	4,500	*5,560	3,420	(23.9)
-1.5m	kg	*7,060	5,510	5,390	2,980	3,490	2,000	*2,930	1,700	6.79
-4.9ft	lb	*15,560	12,150	11,880	6,570	7,690	4,410	*6,460	3,750	(22.3)
-3.0m	kg	*7,150	5,620	*5,090	3,020					
-9.8ft	lb	*15,760	12,390	*11,220	6,660					

4.9 m (16' 1") boom, 2.50 m (8' 2") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe Dozer up.

Lift-point height (m/ft)		Lift-point radius						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach (m (ft))
										
7.5m	kg							*3,070	*3,070	4.28
24.6ft	lb							*6,770	*6,770	(14.0)
6.0m	kg			*3,770	*3,770			*2,480	*2,480	5.87
19.7ft	lb			*8,310	*8,310			*5,470	*5,470	(19.3)
4.5m	kg	*3,760	*3,760	*4,090	4,010	*3,700	2,520	*2,280	2,030	6.78
14.8ft	lb	*8,290	*8,290	*9,020	8,840	*8,160	5,560	*5,030	4,480	(22.3)
3.0m	kg	*7,110	7,020	*4,880	3,760	3,840	2,430	*2,240	1,770	7.27
9.8ft	lb	*15,670	15,480	*10,760	8,290	8,470	5,360	*4,940	3,900	(23.9)
1.5m	kg			*5,720	3,490	3,710	2,310	*2,320	1,670	7.43
4.9ft	lb			*12,610	7,690	8,180	5,090	*5,110	3,680	(24.4)
0.0m	kg	*3,870	*3,870	5,580	3,300	3,610	2,220	*2,520	1,690	7.28
0.0ft	lb	*8,530	*8,530	12,300	7,280	7,960	4,890	*5,560	3,730	(23.9)
-1.5m	kg	*7,060	5,950	5,500	3,230	3,560	2,180	*2,930	1,850	6.79
-4.9ft	lb	*15,560	13,120	12,130	7,120	7,850	4,810	*6,460	4,080	(22.3)
-3.0m	kg	*7,150	6,060	*5,090	3,270					
-9.8ft	lb	*15,760	13,360	*11,220	7,210					

4.9 m (16' 1") boom, 2.50 m (8' 2") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe Dozer down.









LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degree









 Rating over-front  Rating over-side or 360 degree

HX145A LCR 2-PIECE BOOM









4.90 m (16' 1") boom, 2.50 m (8' 2") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe.

Lift-point height (m/ft)		Lift-point radius						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach m (ft)
										
7.5m 24.6ft	kg lb							*3,070 *6,770	*3,070 *6,770	4.28 (14.0)
6.0m 19.7ft	kg lb			*3,770 *8,310	*3,770 *8,310			*2,480 *5,470	*2,480 *5,470	5.87 (19.3)
4.5m 14.8ft	kg lb	*3,760 *8,290	*3,760 *8,290	*4,090 *9,020	*4,020 8,860	*3,700 *8,160	2,530 5,580	*2,280 *5,030	2,030 4,480	6.78 (22.3)
3.0m 9.8ft	kg lb	*7,110 *15,670	7,040 15,520	*4,880 *10,760	3,770 8,310	*3,980 *8,770	2,440 5,380	*2,240 *4,940	1,770 3,900	7.27 (23.9)
1.5m 4.9ft	kg lb			*5,720 *12,610	3,490 7,690	3,880 8,550	2,320 5,110	*2,320 *5,110	1,670 3,680	7.43 (24.4)
0.0m 0.0ft	kg lb	*3,870 *8,530	*3,870 *8,530	5,820 12,830	3,310 7,300	3,770 8,310	2,220 4,890	*2,520 *5,560	1,690 3,730	7.28 (23.9)
-1.5m -4.9ft	kg lb	*7,060 *15,560	5,970 13,160	5,750 12,680	3,240 7,140	3,730 8,220	2,180 4,810	*2,930 *6,460	1,860 4,100	6.79 (22.3)
-3.0m -9.8ft	kg lb	*7,150 *15,760	6,080 13,400	*5,090 *11,220	3,280 7,230					

4.90 m (16' 1") boom, 2.50 m (8' 2") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe Dozer up.

Lift-point height (m/ft)		Lift-point radius						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach m (ft)
										
7.5m 24.6ft	kg lb							*3,070 *6,770	*3,070 *6,770	4.28 (14.0)
6.0m 19.7ft	kg lb			*3,770 *8,310	*3,770 *8,310			*2,480 *5,470	*2,480 *5,470	5.87 (19.3)
4.5m 14.8ft	kg lb	*3,760 *8,290	*3,760 *8,290	*4,090 *9,020	*4,090 8,860	*3,700 *8,160	2,700 5,950	*2,280 *5,030	2,180 4,810	6.78 (22.3)
3.0m 9.8ft	kg lb	*7,110 *15,670	*7,110 *15,670	*4,880 *10,760	4,020 8,860	*3,980 *8,770	2,610 5,750	*2,240 *4,940	1,910 4,210	7.27 (23.9)
1.5m 4.9ft	kg lb			*5,720 *12,610	3,740 8,250	3,950 8,710	2,490 5,490	*2,320 *5,110	1,810 3,990	7.43 (24.4)
0.0m 0.0ft	kg lb	*3,870 *8,530	*3,870 *8,530	5,940 13,100	3,560 7,850	3,850 8,490	2,390 5,270	*2,520 *5,560	1,830 4,030	7.28 (23.9)
-1.5m -4.9ft	kg lb	*7,060 *15,560	6,410 14,130	5,860 12,920	3,490 7,690	3,800 8,380	2,360 5,200	*2,930 *6,460	2,010 4,430	6.79 (22.3)
-3.0m -9.8ft	kg lb	*7,150 *15,760	6,520 14,370	*5,090 *11,220	3,530 7,780					

4.90 m (16' 1") boom, 2.50 m (8' 2") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe Dozer down.


Lift-point height (m/ft)		Lift-point radius						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach m (ft)
										
7.5m 24.6ft	kg lb							*3,070 *6,770	*3,070 *6,770	4.28 (14.0)
6.0m 19.7ft	kg lb			*3,770 *8,310	*3,770 *8,310			*2,480 *5,470	*2,480 *5,470	5.87 (19.3)
4.5m 14.8ft	kg lb	*3,760 *8,290	*3,760 *8,290	*4,090 *9,020	*4,090 8,860	*3,700 *8,160	2,700 5,950	*2,280 *5,030	2,180 4,810	6.78 (22.3)
3.0m 9.8ft	kg lb	*7,110 *15,670	*7,110 *15,670	*4,880 *10,760	4,020 8,860	*3,980 *8,770	2,610 5,750	*2,240 *4,940	1,910 4,210	7.27 (23.9)
1.5m 4.9ft	kg lb			*5,720 *12,610	3,740 8,250	3,950 8,710	2,490 5,490	*2,320 *5,110	1,810 3,990	7.43 (24.4)
0.0m 0.0ft	kg lb	*3,870 *8,530	*3,870 *8,530	6,150 13,560	3,560 7,850	*4,520 *9,960	2,390 5,270	*2,520 *5,560	1,830 4,030	7.28 (23.9)
-1.5m -4.9ft	kg lb	*7,060 *15,560	6,410 14,130	*5,990 *13,210	3,490 7,690	*4,350 *9,590	2,360 5,200	*2,930 *6,460	2,010 4,430	6.79 (22.3)
-3.0m -9.8ft	kg lb	*7,150 *15,760	6,520 14,370	*5,090 *11,220	3,530 7,780					

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.











3 | The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).

4 | (*) indicates load limited by hydraulic capacity.













HX145A LCR HW MONO BOOM

4.60 m (15' 1") boom, 2.10 m (6' 11") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe.

Lift-point height (m/ft)		Lift-point radius						At max. reach				
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach m (ft)
												
7.5m 24.6ft	kg lb			*4,760 *10,490	*4,760 *10,490					*4,240 *9,350	*4,240 *9,350	3.18 (10.4)
6.0m 19.7ft	kg lb			*4,930 *10,870	*4,930 *10,870	*4,630 *10,210	4,590 10,120			*3,290 *7,250	*3,290 *7,250	5.06 (16.6)
4.5m 14.8ft	kg lb			*5,680 *12,520	*5,680 *12,520	*4,850 *10,690	4,510 9,940	*3,260 *7,190	2,870 6,330	*3,050 *6,720	*3,050 *6,720	6.03 (19.8)
3.0m 9.8ft	kg lb					*5,570 *12,280	4,300 9,480	4,420 9,740	2,820 6,220	*3,060 *6,750	2,480 5,470	6.52 (21.4)
1.5m 4.9ft	kg lb					*6,230 *13,730	4,080 8,990	4,320 9,520	2,730 6,020	*3,260 *7,190	2,360 5,200	6.64 (21.8)
0.0m 0.0ft	kg lb			*6,820 *15,040	*6,820 *15,040	*6,330 *13,960	3,950 8,710	4,260 9,390	2,670 5,890	*3,710 *8,180	2,450 5,400	6.41 (21.0)
-1.5m -4.9ft	kg lb	*5,990 *13,210	*5,990 *13,210	*7,990 *17,610	7,210 15,900	*5,660 *12,480	3,930 8,660			*3,960 *8,730	2,810 6,190	5.79 (19.0)
-3.0m -9.8ft	kg lb			*5,470 *12,060	*5,470 *12,060	*3,570 *7,870	*3,570 *7,870			*3,360 *7,410	*3,360 *7,410	4.61 (15.1)

4.60m (15' 1") boom, 2.10 m (6' 11") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe.


Lift-point height (m/ft)		Lift-point radius						At max. reach				
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach m (ft)
												
7.5m 24.6ft	kg lb			*4,760 *10,490	*4,760 *10,490					*4,240 *9,350	*4,240 *9,350	3.18 (10.4)
6.0m 19.7ft	kg lb			*4,930 *10,870	*4,930 *10,870	*4,630 *10,210	*4,630 *10,210			*3,290 *7,250	*3,290 *7,250	5.06 (16.6)
4.5m 14.8ft	kg lb			*5,680 *12,520	*5,680 *12,520	*4,850 *10,690	4,770 10,520	*3,260 *7,190	3,050 6,720	*3,050 *6,720	3,030 6,680	6.03 (19.8)
3.0m 9.8ft	kg lb					*5,570 *12,280	4,560 10,050	*4,490 *9,900	3,000 6,610	*3,060 *6,750	2,640 5,820	6.52 (21.4)
1.5m 4.9ft	kg lb					*6,230 *13,730	4,340 9,570	4,560 10,050	2,910 6,420	*3,260 *7,190	2,520 5,560	6.64 (21.8)
0.0m 0.0ft	kg lb			*6,820 *15,040	*6,820 *15,040	*6,330 *13,960	4,210 9,280	4,490 9,900	2,850 6,280	*3,710 *8,180	2,610 5,750	6.41 (21.0)
-1.5m -4.9ft	kg lb	*5,990 *13,210	*5,990 *13,210	*7,990 *17,610	7,680 16,930	*5,660 *12,480	4,190 9,240			*3,960 *8,730	3,000 6,610	5.79 (19.0)
-3.0m -9.8ft	kg lb			*5,470 *12,060	*5,470 *12,060	*3,570 *7,870	*3,570 *7,870			*3,360 *7,410	*3,360 *7,410	4.61 (15.1)

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3 | The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).

4 | (*) indicates load limited by hydraulic capacity.



LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

HX145A LCR HW MONO BOOM

4.60 m (15' 1") boom, 2.50 m (8' 2") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe.

Lift-point height (m/ft)	Lift-point radius								At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach	
	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Capacity	Reach	m (ft)	
7.5m 24.6ft	kg								*2,740	*2,740	3.98	
	lb								*6,040	*6,040	(13.1)	
6.0m 19.7ft	kg			*3,890	*3,890				*2,210	*2,210	5.59	
	lb			*8,580	*8,580				*4,870	*4,870	(18.3)	
4.5m 14.8ft	kg		*4,110	*4,110	*4,440	*4,440	*3,530	2,900	*2,050	*2,050	6.48	
	lb		*9,060	*9,060	*9,790	*9,790	*7,780	6,390	*4,520	*4,520	(21.3)	
3.0m 9.8ft	kg		*7,560	*7,560	*5,270	4,330	*4,300	2,820	*2,040	*2,040	6.94	
	lb		*16,670	*16,670	*11,620	9,550	*9,480	6,220	*4,500	*4,500	(22.8)	
1.5m 4.9ft	kg		*7,200	*7,200	*6,040	4,090	4,320	2,720	*2,140	*2,140	7.05	
	lb		*15,870	*15,870	*13,320	9,020	9,520	6,000	*4,720	*4,720	(23.1)	
0.0m 0.0ft	kg		*7,050	*7,050	*6,320	3,930	4,230	2,640	*2,390	2,210	6.84	
	lb		*15,540	*15,540	*13,930	8,660	9,330	5,820	*5,270	4,870	(22.4)	
-1.5m -4.9ft	kg	*5,250	*5,250	*8,510	7,120	*5,870	3,870	*4,080	2,630	*2,920	2,490	6.25
	lb	*11,570	*11,570	*18,760	15,700	*12,940	8,530	*8,990	5,800	*6,440	5,490	(20.5)
-3.0m -9.8ft	kg	*8,900	*8,900	*6,330	*6,330	*4,360	3,940		*3,300	3,270	5.19	
	lb	*19,620	*19,620	*13,960	*13,960	*9,610	8,690		*7,280	7,210	(17.0)	

4.60m (15' 1") boom, 2.50 m (8' 2") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe.


Lift-point height (m/ft)	Lift-point radius								At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach	
	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Capacity	Reach	m (ft)	
7.5m 24.6ft	kg								*2,740	*2,740	3.98	
	lb								*6,040	*6,040	(13.1)	
6.0m 19.7ft	kg			*3,890	*3,890				*2,210	*2,210	5.59	
	lb			*8,580	*8,580				*4,870	*4,870	(18.3)	
4.5m 14.8ft	kg		*4,110	*4,110	*4,440	*4,440	*3,530	3,080	*2,050	*2,050	6.48	
	lb		*9,060	*9,060	*9,790	*9,790	*7,780	6,790	*4,520	*4,520	(21.3)	
3.0m 9.8ft	kg		*7,560	*7,560	*5,270	4,600	*4,300	3,000	*2,040	*2,040	6.94	
	lb		*16,670	*16,670	*11,620	10,140	*9,480	6,610	*4,500	*4,500	(22.8)	
1.5m 4.9ft	kg		*7,200	*7,200	*6,040	4,350	4,550	2,900	*2,140	*2,140	7.05	
	lb		*15,870	*15,870	*13,320	9,590	10,030	6,390	*4,720	*4,720	(23.1)	
0.0m 0.0ft	kg		*7,050	*7,050	*6,320	4,190	4,470	2,820	*2,390	2,370	6.84	
	lb		*15,540	*15,540	*13,930	9,240	9,850	6,220	*5,270	5,220	(22.4)	
-1.5m -4.9ft	kg	*5,250	*5,250	*8,510	7,590	*5,870	4,140	*4,080	2,810	*2,920	2,670	6.25
	lb	*11,570	*11,570	*18,760	16,730	*12,940	9,130	*8,990	6,190	*6,440	5,890	(20.5)
-3.0m -9.8ft	kg	*8,900	*8,900	*6,330	*6,330	*4,360	4,200		*3,300	*3,300	5.19	
	lb	*19,620	*19,620	*13,960	*13,960	*9,610	9,260		*7,280	*7,280	(17.0)	

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3 | The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).

4 | (*) indicates load limited by hydraulic capacity.



Rating over-front Rating over-side or 360 degree

HX145A LCR HW MONO BOOM

4.60 m (15' 1") boom, 3.00 m (9' 10") arm equipped with 2,800kg counter weight and 600mm (24") Triple grouser shoe.

Lift-point height (m/ft)	Lift-point radius										At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5m (24.6ft)		Capacity		Reach	
	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Capacity	Reach	m (ft)	
7.5m 24.6ft	kg					*2,750	*2,750					*2,200	*2,200	4.76
	lb					*6,060	*6,060					*4,850	*4,850	(15.6)
6.0m 19.7ft	kg					*3,280	*3,280	*2,330	*2,330			*1,860	*1,860	6.17
	lb					*7,230	*7,230	*5,140	*5,140			*4,100	*4,100	(20.2)
4.5m 14.8ft	kg					*3,530	*3,530	*3,320	2,940			*1,750	*1,750	6.98
	lb					*7,780	*7,780	*7,320	6,480			*3,860	*3,860	(22.9)
3.0m 9.8ft	kg			*6,650	*6,650	*4,880	4,410	*4,070	2,850			*1,750	*1,750	7.41
	lb			*14,660	*14,660	*10,760	9,720	*8,970	6,280			*3,860	*3,860	(24.3)
1.5m 4.9ft	kg			*9,010	7,580	*5,780	4,140	4,340	2,740	*1,910	*1,910	*1,830	*1,830	7.51
	lb			*19,860	16,710	*12,740	9,130	9,570	6,040	*4,210	*4,210	*4,030	*4,030	(24.7)
0.0m 0.0ft	kg			*7,570	7,180	*6,270	3,940	4,230	2,640			*2,030	2,000	7.31
	lb			*16,690	15,830	*13,820	8,690	9,330	5,820			*4,480	4,410	(24.0)
-1.5m -4.9ft	kg	*4,670	*4,670	*9,050	7,080	*6,080	3,850	4,180	2,600			*2,430	2,210	6.77
	lb	*10,300	*10,300	*19,950	15,610	*13,400	8,490	9,220	5,730			*5,360	4,870	(22.2)
-3.0m -9.8ft	kg	*7,980	*7,980	*7,280	7,160	*5,010	3,880					*3,290	2,760	5.80
	lb	*17,590	*17,590	*16,050	15,790	*11,050	8,550					*7,250	6,080	(19.0)

4.60 m (15' 1") boom, 3.00 m (9' 10") arm equipped with 3,300kg counter weight and 600mm (24") Triple grouser shoe.


Lift-point height (m/ft)	Lift-point radius										At max. reach			
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5m (24.6ft)		Capacity		Reach	
	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Rating over-front	Rating over-side or 360 degree	Capacity	Reach	m (ft)	
7.5m 24.6ft	kg					*2,750	*2,750					*2,200	*2,200	4.76
	lb					*6,060	*6,060					*4,850	*4,850	(15.6)
6.0m 19.7ft	kg					*3,280	*3,280	*2,330	*2,330			*1,860	*1,860	6.17
	lb					*7,230	*7,230	*5,140	*5,140			*4,100	*4,100	(20.2)
4.5m 14.8ft	kg					*3,530	*3,530	*3,320	3,130			*1,750	*1,750	6.98
	lb					*7,780	*7,780	*7,320	6,900			*3,860	*3,860	(22.9)
3.0m 9.8ft	kg			*6,650	*6,650	*4,880	4,670	*4,070	3,030			*1,750	*1,750	7.41
	lb			*14,660	*14,660	*10,760	10,300	*8,970	6,680			*3,860	*3,860	(24.3)
1.5m 4.9ft	kg			*9,010	8,050	*5,780	4,400	*4,430	2,920	*1,910	*1,910	*1,830	*1,830	7.51
	lb			*19,860	17,750	*12,740	9,700	*9,770	6,440	*4,210	*4,210	*4,030	*4,030	(24.7)
0.0m 0.0ft	kg			*7,570	*7,570	*6,270	4,200	4,470	2,820			*2,030	*2,030	7.31
	lb			*16,690	*16,690	*13,820	9,260	9,850	6,220			*4,480	*4,480	(24.0)
-1.5m -4.9ft	kg	*4,670	*4,670	*9,050	7,550	*6,080	4,120	*4,360	2,780			*2,430	2,370	6.77
	lb	*10,300	*10,300	*19,950	16,640	*13,400	9,080	*9,610	6,130			*5,360	5,220	(22.2)
-3.0m -9.8ft	kg	*7,980	*7,980	*7,280	*7,280	*5,010	4,140					*3,290	2,950	5.80
	lb	*17,590	*17,590	*16,050	*16,050	*11,050	9,130					*7,250	6,500	(19.0)

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3 | The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).

4 | (*) indicates load limited by hydraulic capacity.



BUCKET SELECTION GUIDE & DIGGING FORCE

BUCKETS

All buckets are welded with high-strength steel.



SAE Heaped m³ (yd³) 0.58 (0.76) 0.52 (0.68) 0.65 (0.85) ◆ 0.50 (0.65) ◆ 0.61 (0.80) 0.66 (0.86) 0.77 (1.01)

Capacity m³ (yd³)		Width mm (in)		Weight kg (lb)	Tooth EA	Recommendation mm (ft-in)					
SAE Heaped	CECE Heaped	Without Side Cutters	With Side Cutters			2,800 kg CWT					
						4,100 (13' 5") Mono Boom		4,600 (15' 1") Mono Boom		4,940 (16' 2") 2PC Boom	
						1,900 (6' 5") Arm	2,100 (6' 11") Arm	2,500 (8' 2") Arm	3,000 (9' 10") Arm	2,100 (6' 11") Arm	2,500 (8' 2") Arm
0.58 (0.76)	0.50 (0.65)	950 (37.4")	1,110 (43.7")	438 (970)	5	●	●	●	●	●	●
0.52 (0.68)	0.46 (0.60)	870 (34.3")	1,020 (40.2")	406 (900)	4	●	●	●	●	●	●
0.65 (0.85)	0.56 (0.73)	1,060 (41.7")	1,210 (47.6")	459 (1,010)	5	●	●	●	■	●	■
◆ 0.50 (0.65)	0.45 (0.59)	762 (30.0")	800 (31.5")	439 (970)	4	●	●	●	●	●	●
◆ 0.61 (0.80)	0.54 (0.71)	914 (36.0")	952 (37.5")	490 (1,080)	5	●	●	●	■	●	■
0.66 (0.86)	0.58 (0.76)	1,050 (41.3")	1,110 (43.7")	493 (1,090)	4	●	●	●	■	●	■
0.77 (1.01)	0.68 (0.89)	1,200 (47.2")	1,260 (49.6")	543 (1,200)	5	●	■	■	▲	■	▲

Capacity m³ (yd³)		Width mm (in)		Weight kg (lb)	Tooth EA	Recommendation mm (ft-in)					
SAE Heaped	CECE Heaped	Without Side Cutters	With Side Cutters			3,300 kg CWT					
						4,100 (13' 5") Mono Boom		4,600 (15' 1") Mono Boom		4,940 (16' 2") 2PC Boom	
						1,900 (6' 5") Arm	2,100 (6' 11") Arm	2,500 (8' 2") Arm	3,000 (9' 10") Arm	2,100 (6' 11") Arm	2,500 (8' 2") Arm
0.58 (0.76)	0.50 (0.65)	950 (37.4")	1,110 (43.7")	438 (970)	5	●	●	●	●	●	●
0.52 (0.68)	0.46 (0.60)	870 (34.3")	1,020 (40.2")	406 (900)	4	●	●	●	●	●	●
0.65 (0.85)	0.56 (0.73)	1,060 (41.7")	1,210 (47.6")	459 (1,010)	5	●	●	●	●	●	●
◆ 0.50 (0.65)	0.45 (0.59)	762 (30.0")	800 (31.5")	439 (970)	4	●	●	●	●	●	●
◆ 0.61 (0.80)	0.54 (0.71)	914 (36.0")	952 (37.5")	490 (1,080)	5	●	●	●	●	●	●
0.66 (0.86)	0.58 (0.76)	1,050 (41.3")	1,110 (43.7")	493 (1,090)	4	●	●	●	■	●	■
0.77 (1.01)	0.68 (0.89)	1,200 (47.2")	1,260 (49.6")	543 (1,200)	5	●	●	■	▲	■	▲

◆ Hammerless tooth bucket

- : Applicable for materials with density of 2,100 kgf/m³ (3,500 lbf/yd³) or less
- : Applicable for materials with density of 1,800 kgf/m³ (3,000 lbf/yd³) or less
- : Applicable for materials with density of 1,500 kgf/m³ (2,500 lbf/yd³) or less
- ▲ : Applicable for materials with density of 1,200 kgf/m³ (2,000 lbf/yd³) or less
- x : Not recommended

ATTACHMENT

Booms and arms are welded with a low-stress, full-box section design. 4.1 m, 4.6 m mono booms & 4.9 m 2-piece boom, 1.9 m, 2.1 m, 2.5 m & 3.0 m arms are available.

DIGGING FORCE

Boom	Length	mm (ft-in)	4,100 (13' 5") Mono Boom	4,600 (15' 1") Mono Boom			4,900 (16' 1") 2PC Boom		Remark
	Weight	kg (lb)	1,051 (2,320)	1,091 (2,410)			1,461 (3,220)		
Arm	Length	mm (ft-in)	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")	2,100 (6' 11")	2,500 (8' 2")	[] : Power Boost
	Weight	kg (lb)	634 (1,400)	654 (1,440)	714 (1,570)	749 (1,650)	654 (1,440)	714 (1,570)	
Bucket Digging Force	SAE	kgf	8,955 [9,720]	8,960 [9,730]	8,960 [9,730]	8,956 [9,720]	8,960 [9,730]	8,960 [9,730]	
		lbf	19,742 [21,429]	19,754 [21,451]	19,754 [21,451]	19,745 [21,429]	19,754 [21,451]	19,754 [21,451]	
	ISO	kN	103 [112]	103 [112]	103 [112]	103 [112]	103 [112]	103 [112]	
		kgf	10,490 [11,390]	10,497 [11,400]	10,497 [11,400]	10,492 [11,390]	10,497 [11,400]	10,497 [11,400]	
Arm Crowd Force	SAE	kN	82 [89]	74 [80]	63 [68]	56 [61]	74 [80]	63 [68]	
		kgf	8,360 [9,080]	7,506 [8,150]	6,396 [6,940]	5,711 [6,200]	7,506 [8,150]	6,396 [6,940]	
	ISO	kN	86 [94]	77 [84]	65 [71]	58 [63]	77 [84]	65 [71]	
		kgf	8,785 [9,540]	7,863 [8,540]	6,665 [7,240]	5,924 [6,430]	7,863 [8,540]	6,665 [7,240]	
		lbf	19,367 [21,032]	17,334 [18,827]	14,694 [15,961]	13,060 [14,176]	17,334 [18,827]	14,694 [15,961]	

Note : Boom weight includes arm cylinder, piping, and pin
Arm weight includes bucket cylinder, linkage, and pin

STANDARD / OPTION

ENGINE	STD	OPT
Cummins F3.8		
Engine Auto Idle	●	
Engine Auto Shutdown Control	●	
Emergency Engine Stop Switch	●	
HYDRAULIC SYSTEM	STD	OPT
Intelligent Power Control (IPC) Upgrade		
3-Power Mode, 2-Work Mode, User Mode	●	
Variable Power Control	●	
Pump Flow Control	●	
Attachment Mode Flow Control		●
Hyundai Bio Hydraulic oil (HBHO)		●
CAB & INTERIOR	STD	OPT
ISO Standard Cabin		
Rise-Up Type Windshield Wiper	●	
Radio / USB Player	●	
Handsfree Mobile Phone System with USB	●	
12V Power Outlet (24V DC to 12V DC converter)	●	
Electric Horn	●	
All-Weather Steel Cab with 360° Visibility	●	
Safety glass - Tempered glass	●	
Safety glass - Tempered glass with front laminated glass		●
Sliding Fold-In Front Window	●	
Sliding Side Window (LH)	●	
Lockable Door	●	
Storage Compartment	●	
Ashtray & Cigar Lighter		●
Transparent Cabin Roof-Cover	●	
Sun Visor	●	
Door And Cab Locks, One Key	●	
Mechanical Suspension Seat With Heater	●	
Pilot-Operated Slidable Joystick	●	
Console Box Height Adjust System	●	
Automatic Climate Control		
Air Conditioner & Heater	●	
Defroster	●	
Starting Aid (Air Grid Heater) for Cold Weather	●	
Centralized Monitoring		
8" LCD Display	●	
Engine Speed or Trip Meter / Accel.	●	
Engine Coolant Temperature Gauge	●	
Max Power	●	
Low Speed / High Speed	●	
Auto Idle	●	
Overload warning with alarm		●
Check Engine	●	
Air Cleaner Clogging Indicators	●	
ECO Gauges	●	
Fuel Level Gauge	●	
Hyd. Oil Temperature Gauge	●	
Fuel Warmer	●	
Warnings	●	
Communication Error	●	
Low Battery	●	
Clock	●	
Cabin Lights	●	
Cabin Front Window Rain Guard		●
Cabin Roof-Steel Cover		●
Seat		
Adjustable Air Suspension Seat With Heater		●
Cabin FOG (ISO 10262) Level 2		
FOG (Falling Object Protective Structure) · ISO 10262 Level 2		●
Cabin ROPS (ISO 12117-2)		
ROPS (Roll Over Protective Structures) · ISO 12117-2	●	

SAFETY	STD	OPT
Lifting Mode	●	
Auto Safety Lock	●	
Seatbelt Warning Alarm	●	
Battery Master Switch	●	
Rear View Camera		●
Rear & RH View Camera		●
AAVM (Advanced Around View Monitoring)		●
Four Front Working Lights (2 Boom Mounted, 2 Front Frame Mounted)	●	
Travel Alarm	●	
Beacon Lamp		●
Automatic Swing Brake	●	
Boom Holding System	●	
Arm Holding System	●	
Safety Lock Valve For Boom Cylinder With Overload Warning Device		●
Safety Lock Valve For Arm Cylinder		●
Swing Lock System		●
Three Outside Rearview Mirror	●	
Guardrail - Boxing Ring		●
ATTACHMENT	STD	OPT
Booms		
4.1 m, 13' 5" Mono		●
4.6 m, 15' 1" Mono	●	
4.9 m, 16' 1" 2-Piece		●
Arms		
1.9 m, 6' 3"		●
2.1 m, 6' 11"		●
2.5 m, 8' 2"	●	
3.0 m, 9' 10"		●
OTHER	STD	OPT
Fuel Pre-Filter	●	
Fuel Warmer	●	
Pre-Cleaner		●
Coolant Heater		●
Self-Diagnostics System	●	
Hi MATE (Remote Management System)		●
Batteries (2 × 12 V × 100 AH)	●	
Fuel Filler Pump (20 lpm)		●
Single-Acting Piping Kit (Breaker, Etc.)		●
Double-Acting Piping Kit (Clamshell, Etc.)		●
Proportional Auxiliary Hydraulic System		●
2 Way Proportional RCV & Pedal Control Selection		●
Rotating Piping Kit		●
Bucket Line Dividing Kit		●
Air Compressor		●
Quick Coupler Piping		●
Quick Coupler		●
One Pedal Straight Travel System		●
Accumulator For Lowering Work Equipment	●	
Pattern Change Valve (2 Patterns)		●
Fine (Cushion/Free) Swing Control		●
Tool Kit		●
UNDERCARRIAGE	STD	OPT
Lower Frame Under Cover	●	
Dozer Blade		●
Track Shoes		
Triple Grousers Shoes (500 mm, 20")		●
Triple Grousers Shoes (600 mm, 24")	●	
Triple Grousers Shoe (700 mm, 28")		●
Rubber Pad (500 mm, 20")		●
Track Pad - Bolting Type (600mm, 24")		●
Triple Grousers Shoe (700 mm, 28") - H/W		●
Triple Grousers Shoe (800 mm, 32") - H/W		●
Track Guard	●	
Full Track Guard - H/W		●

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.
* The photos may include attachments and optional equipment that are not available in your area.
* Materials and specifications are subject to change without advance notice.
* All imperial measurements rounded off to the nearest pound or inch.

MEMO

MEMO